



A WORLD OF
POSSIBILITIES



FITTINGS PRODUCT CATALOG

Keeping the world moving and working.





A WORLD OF
POSSIBILITIES

Alkon has one of the most extensive lines of pneumatic fittings in the business. We are also one of the largest manufacturers of brass push-to-connect (PTC) fittings in the U.S. and can create custom part orders on short notice.

If you don't know Alkon, maybe you should.



WE'RE IN THE PEOPLE BUSINESS

We use our own fittings and valves in the production machines we build to make your fittings and valves. We know how much quality matters, but the one thing that matters more is making sure you get what you need. Whether it's a custom solution or off the shelf, we want it to be right. That approach builds strong customer relationships.



A PASSION FOR SOLUTIONS

Alkon has developed several innovative, now-patented designs since we opened for business, and we continue to expand our fittings lines with newly tested designs, materials, and more custom solutions than any other supplier. Unlike most of our competitors, we find solutions when others still see problems. We've developed unique technologies for manufacturing our products. We make sure all incoming materials meet our high quality standards.

Keeping the world moving and working.



Corporate Headquarters/ USA Head Office

728 Graham Drive
Fremont, OH 43420
P: 419.333.7000
F: 419.355.9211

Mexico Head Office

Alkon Products, S.A. de C.V.
Destajistas No. 20
Parque Industrial Xhala
Cuautitlan Izcalli EDO. DE MEX.
C.P. 54730, P: 872-46-97
P: 872-58-09, F: 872-31-62

www.alkoncorp.com
sales@alkoncorp.com



BORN IN THE U.S.A.

Alkon began as a small startup with a single line in Hawthorne, New Jersey in the mid-1950s and we've continued to grow every year since. Our executives are not only active in the company every day, but passionate about our success.



Alkon Corporation is committed to robust quality and service through continuous improvement, innovative design, dependable delivery and an emphasis on customer relations.

65+ YEARS OF “WE’VE GOT THIS”

Today, we're a leading U.S. manufacturer of brass push-to-connect (PTC) fittings. We have more than 65 years of expertise and the technology to produce custom fittings and valves from the design stage through engineering to manufacturing and delivery.

Of course, we design custom fittings. Give us a short amount of time and we can design, engineer and manufacture exactly the fitting you need.

Need fittings? We've got this.



Alkon fittings measure up to just about any pneumatics job on Earth. Our products are used on aircraft carriers, refrigerators, heavy equipment, public transit vehicles, and much more, from low riders to high-flying amusement rides.

TABLE OF CONTENTS

HOW TO USE THE ALKON PUSH-IN FITTINGS	5
SERIES AQ NICKEL-PLATED BRASS PUSH-IN FITTINGS.....	6
SERIES PAQ AIR BRAKE COMPOSITE PUSH-IN DOT FITTINGS.....	17
SERIES AQ-DOT AIR BRAKE BRASS PUSH-IN FITTINGS.....	20
SERIES MAQ METRIC BRASS PUSH-IN INDUSTRIAL FITTINGS.....	29
SERIES MAQ-DOT METRIC AIR BRAKE BRASS PUSH-IN FITTINGS	34
BRASS PUSH-IN FITTINGS ORDERING GUIDE.....	37
SERIES AP BRASS TUBE FITTINGS FOR PLASTIC TUBING.....	38
SERIES XQ-DOT AIR BRAKE BRASS PUSH-IN FITTINGS.....	46
SERIES 60 COMPRESSION FITTINGS	51
CUSTOMIZED FITTINGS	54
SERIES 100 PIPE FITTINGS.....	55
SERIES 29 BARB ADAPTERS.....	61
FITTINGS FOR MISTING APPLICATIONS	62
SERIES NQ-NTA AIR BRAKE BRASS COMPRESSION FITTINGS.....	63
SERIES AP310 ANGLE & IN-LINE NEEDLE VALVES	68
SERIES J ANGLE & IN-LINE FLOW CONTROL, NEEDLE AND CHECK VALVES	69
INDUSTRIAL TUBING	72
TUBING ACCESSORIES.....	73
EMERGENCY REPAIR KITS.....	74
MANIFOLDS WITH PRE-INSTALLED PUSH-IN FITTING CARTRIDGES.....	75



IN PNEUMATIC CONNECTIONS, WE DO IT ALL

We can make any product from scratch to your specs, in aluminum, brass, stainless steel or engineered plastics. We manufacture and assemble in short runs and large production, even on short notice.



Fittings: Shaped or straight, swivel or stationary industrial fittings (push-to-connect [PTC], brass pipe, compression-type), manifolds and specialty (MQ manifolds, MTQ connectors and design-your-own).

Alkon fittings are available in nickel-plated brass for lasting durability in harsh operating conditions and in high-demand lightweight composite material. Brass fittings without nickel plating are available anytime.

Valves: Directional control, lockout, 3-way and 4-way, no-lube , lap-spool , sprite, stand-alone , manifolds and stacks, standard or high-temperature sealant, just call us.

Flow Controls: Angle and in-line products and needle valves – all known for high-flow, reliable performance.

For information on Alkon products and services, e-mail us today at sales@alkoncorp.com.



BRASS PUSH-IN FITTINGS

How to Use Alkon Push-In Fittings



TO CONNECT TUBE:

Cut plastic as squarely as possible.


Insert tube into fitting until friction is felt as tube slides past the O-ring.

Using a slight twisting motion while inserting the tube is often helpful.

After this initial friction is felt, continue to push in the tube until it bottoms firmly against the internal tube stop.

TO DISCONNECT TUBE:

With thumb and forefinger, hold down the top of the insert against the fitting body, and with the other hand, pull out the tubing. No tools are needed.

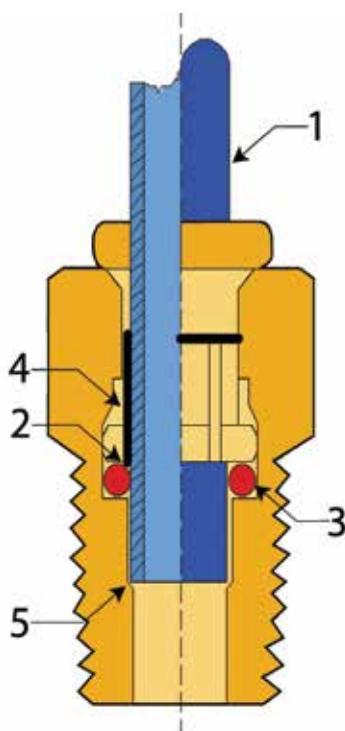

When tubing (1) is inserted into the fitting, it first passes through the gripping teeth (2). Just beyond the gripping teeth is the O-ring (3), which provides the leakproof seal against the O.D. of the tube. The gripping teeth grab the tube, which expands the insert. Pulling back on the tube only tightens the grip as the insert moves onto the camming surface (4).

Pressure through the tube also serves to tighten the grip. The tube bottoms against a positive tube stop (5) in a cavity, providing tube support to prevent leakage.

Alkon Series AQ push-in fittings are designed for compressed air application; for all other applications consult factory.



SERIES AQ

NICKEL-PLATED BRASS PUSH-IN FITTINGS

The Series AQ push-in fittings family is Alkon's flagship product line. These fittings are available in thousands of standard and custom configurations, all with the same premium quality and performance.

ALKON SERIES AQ FITTINGS ARE:

- ◆ Made here, from raw brass bars to final assembly for total quality control
- ◆ Available in nickel-plated CA 360 and CA 377 brass for high gloss and corrosion resistance
- ◆ Engineered and tested to ensure maximum flow, easy installation and the most reliable airtight seal



ALKON FEATURE

YOUR BENEFIT

Positive seal; more tube support area beyond the O-ring than competing products

Compensates for bias-cut tubing, cuts troubleshooting time dramatically

Swivel elbows and tees

Easier close center-line installation, no orientation problems

Fixed elbows and tees

Utmost in economy

Sealant (LOCTITE® 516 standard; others available) pre-applied to all AQ Series male threads

No charge

Custom part orders are welcome

Get and pay for exactly what you need – nothing more, nothing less



LOCTITE® is a trademark of Henkel Corporation, U.S.A.

SERIES AQ

SPECIFICATIONS

Materials of Construction

Body (straights), tube supports, and grippers: Brass CA 360; forged elbows and tees: Brass CA377; O-ring; NBR-269, alternate compounds on request.

Temperature Range

-40°F to 220°F
(other ranges available upon request)

Threads

NPTF standard; for other thread standards, consult factory.

Tube O.D. Sizes

Series AQ - 1/8", 5/32", 3/16", 1/4", 3/8", 1/2"

Recommended Tubing


Nylon & Polyethylene

Working Pressure

The fitting is suitable for use up to the maximum working pressure of the recommended tubing.


CAD data available upon request.

NICKEL-PLATED BRASS PUSH-IN FITTINGS




AQ34/32 BARB ADAPTER

Part Number	A	B	C
AQ34-B-1*	0.50	0.09	0.250
AQ34-B-2*	0.50	0.20	0.250




AQ52-N UNION CROSS

Part Number	Tube O.D.	A	B	C
AQ52-N-2	1/8	0.73	1.46	5/16
AQ52-N-5/32*	5/32	0.76	1.52	5/16
AQ52-N-4	1/4	1.05	2.10	3/8
AQ52-N-6	3/8	1.08	2.16	1/2
AQ52-N-8*	1/2	1.26	2.52	5/8

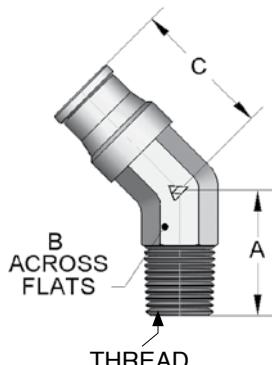


AQ54-N 45° MALE ELBOW

Part Number	Tube O.D.	Pipe	A	B	C
AQ54-N-4X2*	1/4	1/8	0.75	3/8	.99
AQ54-N-4X4*	1/4	1/4	.89	3/8	.99
AQ54-N-6X2*	3/8	1/8	0.75	1/2	.99
AQ54-N-6X4*	3/8	1/4	0.95	1/2	1.08
AQ54-N-6X6*	3/8	3/8	.97	1/2	1.08
AQ54-N-8X4*	1/2	1/4	1.00	5/8	1.20
AQ54-N-8X6*	1/2	3/8	1.05	5/8	1.20
AQ54-N-8X8	1/2	1/2	1.20	5/8	1.20



AQ56-N TUBE-TO-TUBE UNION REDUCER

Part Number	Tube O.D. 1	Tube O.D. 2	A	B
AQ56-N-4X5/32*	1/4	5/32	1.43	7/16
AQ56-N-6X4	3/8	1/4	1.85	5/8




AQ59-N PLUG

Part Number	A	B	C
AQ59-N-2	1/8	1.12	0.35
AQ59-N-5/32	5/32	1.16	0.32
AQ59-N-4	1/4	1.40	0.43
AQ59-N-6	3/8	1.40	0.55
AQ59-N-8	1/2	1.50	0.70

* Made to Order – consult factory for price and availability.


SERIES AQ

NICKEL-PLATED BRASS PUSH-IN FITTINGS




AQ62-N UNION CONNECTOR

Part Number	Tube O.D.	A	B
AQ62-N-2	1/8	1.23	3/8
AQ62-N-5/32	5/32	1.34	3/8
AQ62-N-4	1/4	1.82	7/16
AQ62-N-5	5/16	1.89	19/32
AQ62-N-6	3/8	1.82	21/32
AQ62-N-8	1/2	2.02	25/32




AQ64-N UNION TEE

Part Number	Tube O.D.	A	B	C
AQ64-N-2	1/8	0.73	0.91	5/16
AQ64-N-5/32	5/32	0.76	0.94	5/16
AQ64-N-3	3/16	0.83	1.04	3/8
AQ64-N-4	1/4	0.94	1.17	3/8
AQ64-N-6	3/8	1.08	1.41	1/2
AQ64-N-8	1/2	1.26	1.65	5/8



AQ65-N UNION ELBOW

Part Number	Tube O.D.	A	B	C
AQ65-N-2	1/8	0.73	0.91	5/16
AQ65-N-5/32	5/32	0.76	0.94	5/16
AQ65-N-4	1/4	0.94	1.17	3/8
AQ65-N-5	5/16	1.04	1.37	7/16
AQ65-N-6	3/8	1.08	1.41	1/2
AQ65-N-8	1/2	1.26	1.65	5/8




AQ66-N FEMALE CONNECTOR

Part Number	Tube O.D.	Female Pipe	A	B
AQ66-N-2X2	1/8	1/8	1.04	9/16
AQ66-N-5/32X2	5/32	1/8	1.09	9/16
AQ66-N-3X2	3/16	1/8	1.21	9/16
AQ66-N-4X2	1/4	1/8	1.33	9/16
AQ66-N-4X4	1/4	1/4	1.55	3/4
AQ66-N-6X4	3/8	1/4	1.52	3/4
AQ66-N-6X6	3/8	3/8	1.56	7/8
AQ66-N-8X8	1/2	1/2	1.85	1-1/8

SERIES AQ


NICKEL-PLATED BRASS PUSH-IN FITTINGS



AQ688-N PRESS-IN CARTRIDGE

Part Number	Tube O.D.	A	B	C
AQ688-N-2X00	1/8	0.67	0.47	3/8
AQ688-N-5/32X00	5/32	0.67	0.47	3/8
AQ688-N-3X00*	3/16	0.72	0.57	7/16
AQ688-N-4X00	1/4	0.95	0.69	1/2
AQ688-N-6X00	3/8	1.23	0.97	5/8

AQ68-N MALE CONNECTOR




Part Number	Tube O.D.	Pipe	A	B
AQ68-N-2X0	1/8	10/32**	0.79	3/8
AQ68-N-2X1	1/8	1/16	0.76	3/8
AQ68-N-2X2	1/8	1/8	0.77	7/16
AQ68-N-2X4	1/8	1/4	0.98	9/16
AQ68-N-5/32X0	5/32	10/32**	0.79	3/8
AQ68-N-5/32X2	5/32	1/8	0.77	7/16
AQ68-N-5/32X4	5/32	1/4	0.95	9/16
AQ68-N-3X0	3/16	10/32**	0.89	3/8
AQ68-N-3X1	3/16	1/16	1.02	3/8
AQ68-N-3X2	3/16	1/8	1.01	7/16
AQ68-N-3X4	3/16	1/4	1.02	9/16
AQ68-N-4X0	1/4	10/32**	0.99	7/16
AQ68-N-4X1	1/4	1/16	1.17	7/16
AQ68-N-4X2	1/4	1/8	0.98	7/16
AQ68-N-4X4	1/4	1/4	0.90	9/16
AQ68-N-4X6	1/4	3/8	0.87	11/16
AQ68-N-5X2	5/16	1/8	1.16	9/16
AQ68-N-5X4	5/16	1/4	1.16	5/8
AQ68-N-5X6	5/16	3/8	1.16	11/16
AQ68-N-6X2	3/8	1/8	1.17	11/16
AQ68-N-6X4	3/8	1/4	1.15	11/16
AQ68-N-6X6	3/8	3/8	1.12	11/16
AQ68-N-6X8	3/8	1/2	1.03	7/8
AQ68-N-8X4	1/2	1/4	1.46	13/16
AQ68-N-8X6	1/2	3/8	1.28	13/16
AQ68-N-8X8	1/2	1/2	1.23	7/8

* Made to Order – consult factory for price and availability.

** Furnished with nylon gasket.

SERIES AQ


NICKEL-PLATED BRASS PUSH-IN FITTINGS

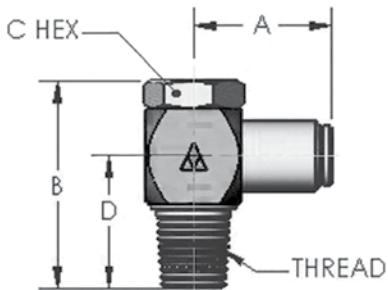

AQ699-NS SWIVEL MALE BANJO ELBOW

Part Number	Tube O.D.	Pipe	A	B	C	D
AQ699-NS-5/32X0	5/32	10/32**	0.71	0.67	5/16	0.46
AQ699-NS-5/32X2*	5/32	1/8	0.76	1.14	1/2	0.69
AQ699-NS-4X2*	1/4	1/8	0.95	1.14	1/2	0.69
AQ699-NS-4X4*	1/4	1/4	0.95	1.49	5/8	0.95
AQ699-NS-4X6*	1/4	3/8	1.08	1.67	3/4	1.09
AQ699-NS-6X4*	3/8	1/4	0.95	1.46	5/8	1.12
AQ699-NS-6X6*	3/8	3/8	1.08	1.67	3/4	1.31

AQ69-N MALE ELBOW

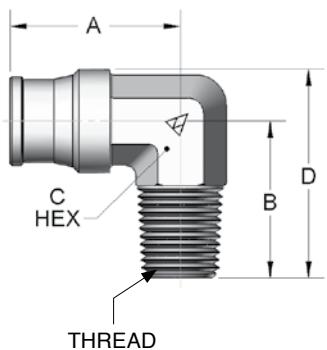

Part Number	Tube O.D.	Pipe	A	B	C	D
AQ69-N-2X2	1/8	1/8	0.77	0.69	5/16	0.87
AQ69-N-5/32X2	5/32	1/8	0.76	0.68	5/16	0.89
AQ69-N-3X2	3/16	1/8	0.83	0.71	3/8	0.92
AQ69-N-4X2	1/4	1/8	0.97	0.79	3/8	0.99
AQ69-N-4X4	1/4	1/4	1.03	0.84	3/8	1.02
AQ69-N-4X6	1/4	3/8	1.08	0.98	1/2	1.27
AQ69-N-6X2	3/8	1/8	1.03	0.80	1/2	1.12
AQ69-N-6X4	3/8	1/4	1.06	0.98	1/2	1.29
AQ69-N-6X6	3/8	3/8	1.05	0.98	1/2	1.31
AQ69-N-8X4	1/2	1/4	1.23	1.05	5/8	1.44
AQ69-N-8X6	1/2	3/8	1.23	1.05	5/8	1.44
AQ69-N-8X8	1/2	1/2	1.24	1.26	5/8	1.64

* Made to Order – consult factory for price and availability.


** Furnished with nylon gasket.

SERIES AQ

NICKEL-PLATED BRASS PUSH-IN FITTINGS


AQ69-NS SWIVEL MALE ELBOW

Part Number	Tube O.D.	Pipe	A	B	C	D	E
AQ69-NS-2X0	1/8	10/32**	0.77	0.79	5/16	0.91	5/16
AQ69-NS-2X2	1/8	1/8	0.76	0.90	7/16	1.11	3/8
AQ69-NS-2X4	1/8	1/4	0.77	1.08	9/16	1.29	3/8
AQ69-NS-5/32X0	5/32	10/32**	0.77	0.79	5/16	0.91	5/16
AQ69-NS-5/32X2	5/32	1/8	0.77	0.88	7/16	1.10	3/8
AQ69-NS-5/32X4	5/32	1/4	0.77	1.08	9/16	1.29	3/8
AQ69-NS-3X2	3/16	1/8	0.84	0.89	7/16	1.11	3/8
AQ69-NS-3X4	3/16	1/4	0.88	1.01	9/16	1.23	3/8
AQ69-NS-4X0	1/4	10/32**	0.96	0.76	5/16	1.00	3/8
AQ69-NS-4X2	1/4	1/8	0.94	0.90	7/16	1.14	3/8
AQ69-NS-4X4	1/4	1/4	1.02	1.09	9/16	1.33	3/8
AQ69-NS-4X6	1/4	3/8	1.02	1.13	11/16	1.37	3/8
AQ69-NS-5X2	5/16	1/8	0.95	1.13	7/16	1.43	7/16
AQ69-NS-5X4	5/16	1/4	0.95	1.26	9/16	1.56	7/16
AQ69-NS-6X2	3/8	1/8	1.05	1.06	7/16	1.39	1/2
AQ69-NS-6X4	3/8	1/4	1.08	1.14	9/16	1.46	1/2
AQ69-NS-6X6	3/8	3/8	1.10	1.23	11/16	1.55	1/2
AQ69-NS-6X8	3/8	1/2	1.10	1.53	7/8	1.85	1/2
AQ69-NS-8X4	1/2	1/4	1.26	1.26	9/16	1.65	5/8
AQ69-NS-8X6	1/2	3/8	1.26	1.31	11/16	1.70	5/8
AQ69-NS-8X8	1/2	1/2	1.25	1.61	7/8	2.00	5/8




AQ70-N FEMALE ELBOW

Part Number	Tube O.D.	Female Pipe	A	B	C	D
AQ70-N-2X2	1/8	1/8	0.78	0.82	3/8	1.04
AQ70-N-5/32X2	5/32	1/8	0.76	0.82	3/8	1.04
AQ70-N-4X2	1/4	1/8	1.02	0.83	3/8	1.06
AQ70-N-4X4	1/4	1/4	1.13	1.03	1/2	1.31
AQ70-N-6X4	3/8	1/4	1.08	0.98	1/2	1.31



AQ70-NS SWIVEL FEMALE ELBOW

Part Number	Tube O.D.	Female Pipe	A	B	C	D	E
AQ70-NS-5/32X2	5/32	1/8	0.73	1.04	3/8	1.22	9/16
AQ70-NS-4X2	1/4	1/8	1.02	1.06	3/8	1.30	9/16
AQ70-NS-4X4	1/4	1/4	0.97	1.25	3/8	1.49	3/4
AQ70-NS-6X4	3/8	1/4	1.08	1.48	1/2	1.80	3/4
AQ70-NS-6X6*	3/8	3/8	1.10	1.66	1/2	1.99	7/8
AQ70-NS-8X6*	1/2	3/8	1.25	1.70	5/8	2.09	7/8




* Made to Order – consult factory for price and availability.


** Furnished with nylon gasket.

SERIES AQ


NICKEL-PLATED BRASS PUSH-IN FITTINGS

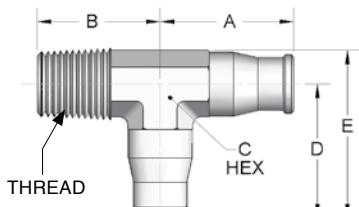
AQ71-N MALE RUN TEE

Part Number	Tube O.D.	Pipe	A	B	C	D	E
AQ71-N-2X2*	1/8	1/8	0.73	0.66	5/16	0.66	0.91
AQ71-N-5/32X2	5/32	1/8	0.75	0.67	5/16	0.75	0.95
AQ71-N-3X2*	3/16	1/8	0.83	0.73	3/8	0.83	1.05
AQ71-N-4X2	1/4	1/8	1.02	0.75	3/8	1.02	1.24
AQ71-N-4X4	1/4	1/4	1.02	0.92	7/16	1.02	1.27
AQ71-N-6X2*	3/8	1/8	1.02	0.92	1/2	1.02	1.29
AQ71-N-6X4	3/8	1/4	1.08	0.98	1/2	1.08	1.40
AQ71-N-6X6	3/8	3/8	1.08	0.98	1/2	1.08	1.31
AQ71-N-8X6*	1/2	3/8	1.26	1.05	5/8	1.26	1.55


AQ71-NS SWIVEL MALE RUN TEE

Part Number	Tube O.D.	Pipe	A	B	C	D	E
AQ71-NS-2X2	1/8	1/8	0.73	0.73	5/16	0.86	7/16
AQ71-NS-5/32X0*	5/32	10/32**	0.76	0.76	5/16	0.73	5/16
AQ71-NS-5/32X2	5/32	1/8	0.76	0.76	5/16	0.82	7/16
AQ71-NS-4X2	1/4	1/8	1.02	1.02	3/8	1.01	7/16
AQ71-NS-4X4	1/4	1/4	1.02	1.02	7/16	1.08	9/16
AQ71-NS-6X2*	3/8	1/8	1.08	1.08	1/2	1.08	7/16
AQ71-NS-6X4	3/8	1/4	1.04	1.04	1/2	1.15	9/16
AQ71-NS-6X6	3/8	3/8	1.06	1.06	1/2	1.17	11/16
AQ71-NS-8X6*	1/2	3/8	1.24	1.24	5/8	1.28	11/16
AQ71-NS-8X8	1/2	1/2	1.24	1.24	5/8	1.58	7/8



AQ72-N MALE BRANCH TEE

Part Number	Tube O.D.	Pipe	A	B	C	D
AQ72-N-2X2*	1/8	1/8	0.73	0.66	5/16	0.84
AQ72-N-5/32X2	5/32	1/8	0.76	0.66	5/16	0.84
AQ72-N-3X2*	3/16	1/8	0.88	0.78	3/8	1.00
AQ72-N-4X2	1/4	1/8	1.02	0.75	3/8	0.98
AQ72-N-4X4	1/4	1/4	1.02	0.92	7/16	1.16
AQ72-N-6X2	3/8	1/8	1.08	0.80	1/2	1.13
AQ72-N-6X4	3/8	1/4	1.08	0.99	1/2	1.31
AQ72-N-6X6	3/8	3/8	1.09	0.98	1/2	1.31
AQ72-N-8X4*	1/2	1/4	1.26	1.07	5/8	1.45
AQ72-N-8X6*	1/2	3/8	1.26	1.07	5/8	1.45

** Made to Order – consult factory for price and availability.*
*** Furnished with nylon gasket.*


SERIES AQ

NICKEL-PLATED BRASS PUSH-IN FITTINGS




AQ72-NS SWIVEL MALE BRANCH TEE

Part Number	Tube O.D.	Pipe	A	B	C	D	E
AQ72-NS-2X2	1/8	1/8	0.73	0.65	5/16	0.81	7/16
AQ72-NS-5/32X0*	5/32	10/32**	0.76	0.72	5/16	0.90	5/16
AQ72-NS-5/32X2	5/32	1/8	0.78	0.82	3/8	1.00	7/16
AQ72-NS-4X2	1/4	1/8	1.02	1.04	3/8	1.28	7/16
AQ72-NS-4X4	1/4	1/4	1.01	1.23	3/8	1.47	9/16
AQ72-NS-6X2	3/8	1/8	1.08	1.07	1/2	1.40	7/16
AQ72-NS-6X4	3/8	1/4	1.06	1.17	1/2	1.50	9/16
AQ72-NS-6X6	3/8	3/8	1.08	1.21	1/2	1.54	11/16
AQ72-NS-8X6	1/2	3/8	1.26	1.31	5/8	1.70	11/16
AQ72-NS-8X8	1/2	1/2	1.26	1.61	5/8	2.00	7/8




AQ73-N REDUCING MALE BRANCH TEE

Part Number	Tube O.D. 1, O.D. 2	Pipe	A	B	C	D	E
AQ73-N-6X4X2*	3/8, 1/4	1/8	1.08	0.93	1/2	0.98	1.31
AQ73-N-6X4X4*	3/8, 1/4	1/4	1.08	1.02	1/2	0.98	1.31




AQ74-N MALE/FEMALE BRANCH TEE

Part Number	Tube O.D.	M, F Thread	A	B	C	D	E
AQ74-N-4X6X4*	3/8	1/4, 1/4	1.08	0.99	1/2	0.98	1.31



AQ75-N TUBE/BARB MALE BRANCH TEE

Part Number	Tube O.D.	Thread, Barb	A	B	C	D	E
AQ75-N-6X4X4B*	3/8	1/4, 1/4	1.08	0.97	1/2	1.29	1.07



AQ76-N MALE/FEMALE RUN TEE


Part Number	Tube O.D.	Female, Male	A	B	C	D	E
AQ76-N-2X4X2	1/4	1/8, 1/8	0.82	0.82	7/16	1.02	1.29
AQ76-N-4X4X2*	1/4	1/8, 1/4	0.73	0.87	7/16	1.03	1.30

* Made to Order – consult factory for price and availability.


** Furnished with nylon gasket.

SERIES AQ


NICKEL-PLATED BRASS PUSH-IN FITTINGS


AQ77-N FEMALE BRANCH TEE


Part Number	Tube O.D.	Female Pipe	A	B	C	D
AQ77-N-4X2	1/4	1/8	1.02	0.82	1/2	1.11
AQ77-N-4X4*	1/4	1/4	1.08	0.97	1/2	1.26
AQ77-N-6X4	3/8	1/4	1.09	0.98	1/2	1.31


AQ77-NS SWIVEL FEMALE BRANCH TEE


Part Number	Tube O.D.	Female Pipe	A	B	C	D	E
AQ77-NS-4X2*	1/4	1/8	1.02	1.13	3/8	1.36	9/16


AQ78-N REDUCING MALE RUN TEE

Part Number	Tube O.D. 1	Tube O.D. 2	Pipe	A	B	C	D	E
AQ78-N-6X4X4*	3/8	1/4	1/4	1.08	0.98	1/2	1.08	1.40


AQ79-N UNION REDUCING TEE

Part Number	Tube O.D. 1	Tube O.D. 2	A	B	C	D
AQ79-N-2X3*	1/8	3/16	0.76	0.78	5/16	0.96
AQ79-N-4X2*	1/4	1/8	0.98	0.90	3/8	1.16
AQ79-N-6X2*	3/8	1/8	1.08	0.92	1/2	1.22
AQ79-N-6X5/32*	3/8	5/32	1.06	0.98	1/2	1.11
AQ79-N-6X4*	3/8	1/4	1.08	1.04	1/2	1.37



AQ82-N BULKHEAD UNION

Part Number	Tube O.D.	A	B	C	D	E
AQ82-N-2*	1/8	1.28	1.12	5/8	5/8	7/16-20
AQ82-N-5/32	5/32	1.28	1.12	5/8	5/8	7/16-20
AQ82-N-3*	3/16	1.43	1.27	11/16	11/16	1/2-20
AQ82-N-4	1/4	1.90	1.69	11/16	11/16	1/2-20
AQ82-N-6	3/8	1.85	1.69	15/16	15/16	3/14-16
AQ82-N-8	1/2	2.05	1.85	1-1/8	1-1/8	15/16-16

* Made to Order – consult factory for price and availability.


SERIES AQ

NICKEL-PLATED BRASS PUSH-IN FITTINGS




AQ86-N FEMALE BULKHEAD UNION

Part Number	Tube O.D.	Female Pipe	A	B	C	D
AQ86-N-4X2	1/4	1/8	1.29	11/16	1/2-20	0.63
AQ86-N-4X4	1/4	1/4	1.46	3/4	1/2-20	0.63
AQ86-N-6X4	3/8	1/4	1.81	3/4	5/8-18	0.99




AQ87-N "Y" CONNECTOR FEMALE

Part Number	Tube O.D.	Female Pipe	A	B	C
AQ87-N-4X4*	1/4	1/4	1.98	1.98	3/4




AQ88-N "Y" CONNECTOR MALE NPT TO DUAL AQ TUBE CONNECTOR

Part Number	Tube O.D. 1	Tube O.D. 2	Pipe	A	B	C
AQ88-N-5/32X2*	5/32	5/32	1/8	1.46	0.44	7/16
AQ88-N-5/32X4*	5/32	5/32	1/4	1.64	0.44	9/16
AQ88-N-4X2*	1/4	1/4	1/8	1.83	0.50	7/16
AQ88-N-4X4	1/4	1/4	1/4	2.01	0.50	9/16



AQ89-N "Y" CONNECTOR TRIPLE TUBE-TO-TUBE-TO-TUBE CONNECTOR

Part Number	Tube O.D. 1	Tube O.D. 2	A	B
AQ89-N-5/32	5/32	5/32	1.39	0.44
AQ89-N-5/32X2*	5/32	1/8	1.37	0.44
AQ89-N-5/32X4*	5/32	1/4	1.63	0.44
AQ89-N-4	1/4	1/4	1.36	0.50
AQ89-N-4X2	1/4	1/8	1.75	0.50
AQ89-N-4X6	1/4	3/8	2.13	0.50
AQ89-N-4X5/32	1/4	5/32	1.78	0.50



AQ90-N "Y" CONNECTOR DUAL TUBE WITH PLUG-IN MALE STUD


Plug-in stud connects to AQ fitting of same tube O.D. and has through-passage for air.

Part Number	Tube O.D. 1	Tube O.D. 2	Stud O.D.	A	B
AQ90-N-5/32*	5/32	5/32	5/32	1.48	0.44
AQ90-N-5/32X4*	5/32	5/32	1/4	1.70	0.44
AQ90-N-4*	1/4	1/4	1/4	2.07	0.50
AQ90-N-4X5/32*	1/4	1/4	5/32	1.85	0.50

** Made to Order – consult factory for price and availability.*

SERIES AQ


NICKEL-PLATED BRASS PUSH-IN FITTINGS



AQ92-N QUICK DISCONNECT

When tube is disconnected, flow shuts off automatically


Part Number	Tube O.D.	Male Pipe	A	B
AQ92-N-4X2	1/4	1/8	0.81	9/16
AQ92-N-4X4	1/4	1/4	1.03	9/16
AQ92-N-6X4*	3/8	1/4	1.16	2.05



AQ97-N REDUCING UNION

For use with SERIES "AQ" Fittings only

Part Number	Tube O.D.	Stud O.D.	A
AQ97-N-2X4	1/8	1/4	1.38
AQ97-N-5/32X4	5/32	1/4	1.44
AQ97-N-5/32X6*	5/32	3/8	1.44
AQ97-N-4X6	1/4	3/8	1.62
AQ97-N-4X8	1/4	1/2	1.69
AQ97-N-6X8*	3/8	1/2	1.69



AQ99-N EXPANDER UNION

For use with SERIES "AQ" Fittings only

Part Number	Tube O.D.	Stud O.D.	A
AQ99-N-4X5/32*	1/4	5/32	1.39
AQ99-N-6X4	3/8	1/4	1.66

Viton® O-Ring Seals in Series AQ Fittings

Viton® seals are available from stock in a selected assortment of parts and can be installed in any Series AQ fitting.

To order, just replace "N" or "NS" in any Series AQ part number with "V" or "VS".

Consult Alkon for availability of AFLAS, EPR, EPDM and other O-ring seals in Series AQ fittings.

Viton® is a registered trademark of DuPont Dow Elastomers.



* Made to Order – consult factory for price and availability.



SERIES PAQ

AIR BRAKE COMPOSITE PUSH-IN DOT FITTINGS

Series PAQ fittings are the ideal solution at half the weight or less. Revolutionary in their design with a high-strength and lightweight composite material tough enough to meet DOT requirements.

Configurations/functions:
Inches, shaped or straight, swivel push-in fittings.

DOT-approved: Series PAQ fittings meet or exceed DOT FMVSS 571.106, SAE J113 and J2494-1 & J2494-3 air brake performance requirements.

ALKON SERIES PAQ FITTINGS ARE:

- ♦ Up to 50% lighter than Alkon brass DOT fittings
- ♦ Designed for easy access, easier repairs
- ♦ Available as specials/custom orders, even on short notice – just ask!



ALKON FEATURE	YOUR BENEFIT
Deeper tube insertion depth	Compensates for bias-cut tubing, cuts troubleshooting time dramatically
Longer floating tube support	Tubing stays round, even with side load, for reliable airflow
Brass tube and thread connection	Durability you can count on
Removable collet and wide, easily accessible wrench flats	Easier seal and collet repair
Swivel elbows and tees	Easier close center-line installation, no orientation problems
Pre-applied ST-3® Thread Sealant on all male threads	No charge
Custom part orders are welcome	Get and pay for exactly what you need – nothing more, nothing less



ST-3® is a trademark of ND Industries.


SERIES PAQ

AIR BRAKE COMPOSITE PUSH-IN DOT FITTINGS

SPECIFICATIONS


Temperature Range: -40°F to 220°F | Others available upon request
Threads: 1/8" - 1/2"
Recommended Tubing: J844 Air Brake Tubing

Alkon AQ-DOT Series meet D.O.T. FMVSS 571.106 Air Brake Performance Requirements; SAE J1131, J2494-1 & J2494-3 Air Brake Performance Requirements




PAQ54 SWIVEL 45° MALE ELBOW

Part Number	Tube O.D.	Thread (NPTF)	A	B	C Hex
PAQ54-DOTS-4X2	1/4	1/8	1.03	0.98	5/8
PAQ54-DOTS-4X4	1/4	1/4	1.03	1.12	5/8
PAQ54-DOTS-4X6	1/4	3/8	1.03	1.12	3/4
PAQ54-DOTS-6X4	3/8	1/4	1.09	1.18	3/4
PAQ54-DOTS-6X6	3/8	3/8	1.09	1.18	3/4
PAQ54-DOTS-6X8	3/8	1/2	1.09	1.39	7/8
PAQ54-DOTS-8X6	1/2	3/8	1.13	1.23	7/8
PAQ54-DOTS-8X8	1/2	1/2	1.13	1.44	7/8




PAQ62 UNION CONNECTOR

Part Number	Tube O.D.	A	B
PAQ62-DOT-4	1/4	1.90	0.57
PAQ62-DOT-6	3/8	1.90	0.71
PAQ62-DOT-8	1/2	1.90	0.89



PAQ64 UNION TEE

Part Number	Tube O.D.	A	B
PAQ64-DOT-4	1/4	1.12	1.41
PAQ64-DOT-6	3/8	1.18	1.53
PAQ64-DOT-8	1/2	1.24	1.69




PAQ65 UNION ELBOW

Part Number	Tube O.D.	A	B
PAQ65-DOT-4	1/4	1.12	1.41
PAQ65-DOT-6	3/8	1.18	1.53
PAQ65-DOT-8	1/2	1.24	1.69

SERIES PAQ


AIR BRAKE COMPOSITE PUSH-IN DOT FITTINGS



PAQ69 SWIVEL 90° MALE ELBOW


Part Number	Tube O.D.	Thread (NPTF)	A	B	C Hex	D
PAQ69-DOTS-4X2	1/4	1/8	1.12	1.06	5/8	1.35
PAQ69-DOTS-4X4	1/4	1/4	1.12	1.21	5/8	1.50
PAQ69-DOTS-4X6	1/4	3/8	1.12	1.21	3/4	1.50
PAQ69-DOTS-6X2	3/8	1/8	1.18	1.16	3/4	1.51
PAQ69-DOTS-6X4	3/8	1/4	1.18	1.27	3/4	1.63
PAQ69-DOTS-6X6	3/8	3/8	1.18	1.27	3/4	1.63
PAQ69-DOTS-6X8	3/8	1/2	1.18	1.49	7/8	1.84
PAQ69-DOTS-8X4	1/2	1/4	1.24	1.34	7/8	1.78
PAQ69-DOTS-8X6	1/2	3/8	1.24	1.34	7/8	1.79
PAQ69-DOTS-8X8	1/2	1/2	1.24	1.55	7/8	2.00

PAQ71 SWIVEL MALE RUN TEE



Part Number	Tube O.D.	Thread (NPTF)	A	B	C Hex	D
PAQ71-DOTS-4X2	1/4	1/8	1.12	1.06	5/8	1.35
PAQ71-DOTS-4X4	1/4	1/4	1.12	1.21	5/8	1.50
PAQ71-DOTS-4X6	1/4	3/8	1.12	1.21	3/4	1.50
PAQ71-DOTS-6X4	3/8	1/4	1.18	1.27	3/4	1.63
PAQ71-DOTS-6X6	3/8	3/8	1.18	1.27	3/4	1.63
PAQ71-DOTS-6X8	3/8	1/2	1.18	1.49	7/8	1.84
PAQ71-DOTS-8X6	1/2	3/8	1.24	1.34	7/8	1.79
PAQ71-DOTS-8X8	1/2	1/2	1.24	1.55	7/8	2.00

PAQ72 SWIVEL MALE BRANCH TEE



Part Number	Tube O.D.	Thread (NPTF)	A	B	C Hex	D
PAQ72-DOTS-4X2	1/4	1/8	1.12	1.06	5/8	1.35
PAQ72-DOTS-4X4	1/4	1/4	1.12	1.21	5/8	1.50
PAQ72-DOTS-4X6	1/4	3/8	1.12	1.21	3/4	1.50
PAQ72-DOTS-6X4	3/8	1/4	1.18	1.27	3/4	1.63
PAQ72-DOTS-6X6	3/8	3/8	1.18	1.27	3/4	1.63
PAQ72-DOTS-6X8	3/8	1/2	1.18	1.49	7/8	1.84
PAQ72-DOTS-8X6	1/2	3/8	1.24	1.34	7/8	1.79
PAQ72-DOTS-8X8	1/2	1/2	1.24	1.55	7/8	2.00



SERIES AQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS

Reliability is always critical, and even more so when you're hauling a heavy load.

Couple that application with the brutal environment of the road and you have a big responsibility riding on a small part.

Alkon Series AQ-DOT fittings are made specifically to meet that challenge.

ALKON SERIES AQ-DOT PUSH-IN FITTINGS ARE:

- ◆ Designed to cut assembly time up to 75%
- ◆ Available in custom sizes, designs and assemblies on short notice



ALKON FEATURE	YOUR BENEFIT
Positive seal; more tube support area beyond the O-ring than competing products	Compensates for bias-cut tubing, cuts troubleshooting time dramatically
Swivel elbows and tees	Easier close center-line installation, no orientation problems
Fixed elbows and tees	Utmost in economy
Sealant (LOCTITE® 516 standard; others available) pre-applied to all AQ-DOT Series male threads	No charge
Custom part orders are welcome	Get and pay for exactly what you need – nothing more, nothing less

LOCTITE® is a trademark of Henkel Corporation, U.S.A.

SERIES AQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS


SPECIFICATIONS

Temperature Range: -40°F to 220°F

Threads: NPTF Standard


Recommended Tubing: J844 Air Brake Tubing

Alkon AQ-DOT Series meet D.O.T. FMVSS 571.106 Air Brake Performance Requirements;
SAE J1131, J2494-1 & J2494-3 Air Brake Performance Requirements

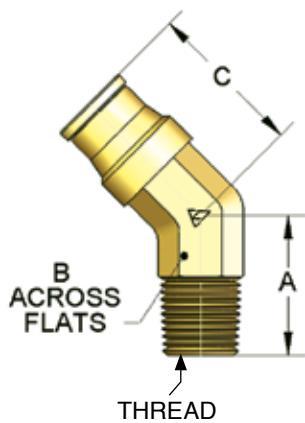

AQ54-DOT 45° MALE ELBOW

Part Number	Tube O.D.	Pipe	A	B	C
AQ54-DOT-4X2	1/4	1/8	0.75	3/8	0.99
AQ54-DOT-4X4	1/4	1/4	0.89	3/8	0.99
AQ54-DOT-6X2	3/8	1/8	0.75	1/2	0.99
AQ54-DOT-6X4	3/8	1/4	0.95	1/2	1.08
AQ54-DOT-6X6	3/8	3/8	0.97	1/2	1.08
AQ54-DOT-6X8	3/8	1/2	1.13	5/8	1.15
AQ54-DOT-8X4	1/2	1/4	1.00	5/8	1.20
AQ54-DOT-8X6	1/2	3/8	1.05	5/8	1.20
AQ54-DOT-8X8	1/2	1/2	1.20	5/8	1.20
AQ54-DOT-10X6*	5/8	3/8	1.17	11/16	1.22
AQ54-DOT-10X8	5/8	1/2	1.31	11/16	1.22
AQ54-DOT-12X8*	3/4	1/2	1.36	15/16	1.18
AQ54-DOT-12X12*	3/4	3/4	1.36	15/16	1.18

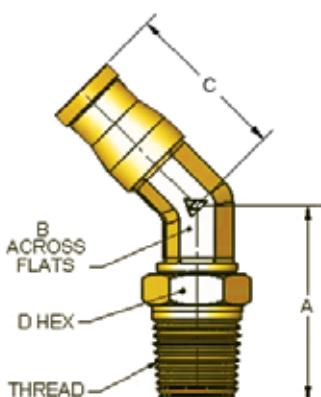


AQ54-DOT SWIVEL 45° MALE ELBOW

Part Number	Tube O.D.	Pipe	A	B	C	D
AQ54-DOTS-4X2	1/4	1/8	0.98	3/8	0.99	7/16
AQ54-DOTS-4X4	1/4	1/4	1.06	3/8	0.99	7/16
AQ54-DOTS-6X2	3/8	1/8	1.08	1/2	1.06	7/16
AQ54-DOTS-6X4	3/8	1/4	1.13	1/2	1.06	9/16
AQ54-DOTS-6X6	3/8	3/8	1.23	1/2	1.08	11/16
AQ54-DOTS-6X8	3/8	1/2	1.46	1/2	1.08	7/8
AQ54-DOTS-8X4*	1/2	1/4	1.22	5/8	1.22	9/16
AQ54-DOTS-8X6	1/2	3/8	1.31	5/8	1.20	11/16
AQ54-DOTS-8X8	1/2	1/2	1.61	5/8	1.20	7/8
AQ54-DOTS-10X6	5/8	3/8	1.38	11/16	1.33	11/16
AQ54-DOTS-10X8	5/8	1/2	1.68	11/16	1.39	7/8
AQ54-DOTS-12X12*	3/4	3/4	2.28	15/16	1.40	1-1/16


* Made to Order – consult factory for price and availability.

SERIES AQ-DOT


AIR BRAKE BRASS PUSH-IN FITTINGS


AQ59 NYLON PLUG


Part Number	A
AQ59-P-5/32	5/32
AQ59-P-4	1/4
AQ59-P-6	3/8
AQ59-P-8	1/2


AQ62-DOT UNION CONNECTOR


Part Number	Tube O.D.	A	B
AQ62-DOT-5/32	5/32	1.38	3/8
AQ62-DOT-3	3/16	1.60	7/16
AQ62-DOT-4	1/4	1.82	7/16
AQ62-DOT-5	5/16	1.89	19/32
AQ62-DOT-6	3/8	1.82	21/32
AQ62-DOT-8	1/2	2.02	25/32
AQ62-DOT-10	5/8	2.04	0.91
AQ62-DOT-12	3/4	2.20	1.06


AQ64-DOT UNION TEE

Part Number	Tube O.D.	A	B	C
AQ64-DOT-4	1/4	0.94	1.17	3/8
AQ64-DOT-6	3/8	1.08	1.41	1/2
AQ64-DOT-8	1/2	1.26	1.65	5/8
AQ64-DOT-10	5/8	1.32	1.77	11/16
AQ64-DOT-12*	3/4	1.44	1.99	15/16


AQ65-DOT UNION ELBOW

Part Number	Tube O.D.	A	B	C
AQ65-DOT-4	1/4	0.94	1.17	3/8
AQ65-DOT-6	3/8	1.08	1.41	1/2
AQ65-DOT-8	1/2	1.26	1.65	5/8



AQ66-DOT FEMALE CONNECTOR

Part Number	Tube O.D.	Female Pipe	A	B
AQ66-DOT-4X2	1/4	1/8	1.33	9/16
AQ66-DOT-4X4	1/4	1/4	1.55	3/4
AQ66-DOT-5/32X2	5/32	1/8	1.09	9/16
AQ66-DOT-6X2	3/8	1/8	1.33	11/16
AQ66-DOT-6X4	3/8	1/4	1.52	3/4
AQ66-DOT-6X6	3/8	3/8	1.56	7/8
AQ66-DOT-8X6*	1/2	3/8	1.59	7/8
AQ66-DOT-8X8*	1/2	1/2	1.85	1-1/8

* Made to Order – consult factory for price and availability.


SERIES AQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS



AQ688-DOT PRESS-IN CARTRIDGE

Part Number	Tube O.D.	A	B	C
AQ688-DOT-5/32*	5/32	0.59	0.69	0.32
AQ688-DOT-3*	3/16	0.68	0.78	0.41
AQ688-DOT-4*	1/4	0.76	0.86	0.41
AQ688-DOT-4X6*	1/4	0.81	0.91	0.64
AQ688-DOT-6*	3/8	0.82	0.92	0.64
AQ688-DOT-8*	1/2	0.92	1.02	0.77




AQ68-DOT MALE CONNECTOR

Part Number	Tube O.D.	Pipe	A	B
AQ68-DOT-5/32X1	5/32	1/16	0.78	3/8
AQ68-DOT-5/32X2	5/32	1/8	0.79	7/16
AQ68-DOT-5/32X4	5/32	1/4	0.95	9/16
AQ68-DOT-3X0	3/16	10/32	0.89	3/8
AQ68-DOT-3X1	3/16	1/16	1.02	3/8
AQ68-DOT-3X2	3/16	1/8	1.02	7/16
AQ68-DOT-3X4	3/16	1/4	1.02	9/16
AQ68-DOT-4XM16	1/4	M16	0.91	7/8
AQ68-DOT-4X1	1/4	1/16	1.17	7/16
AQ68-DOT-4X2	1/4	1/8	0.98	7/16
AQ68-DOT-4X4	1/4	1/4	0.90	9/16
AQ68-DOT-4X6*	1/4	3/8	0.87	11/16
AQ68-DOT-6X2	3/8	1/8	1.17	11/16
AQ68-DOT-6X4	3/8	1/4	1.15	11/16
AQ68-DOT-6X6	3/8	3/8	1.12	11/16
AQ68-DOT-6X8	3/8	1/2	1.03	7/8
AQ68-DOT-6XM12	3/8	M12	1.33	11/16
AQ68-DOT-6XM16	3/8	M16	1.25	7/8
AQ68-DOT-8X4	1/2	1/4	1.46	13/16
AQ68-DOT-8X6	1/2	3/8	1.28	13/16
AQ68-DOT-8X8	1/2	1/2	1.23	7/8
AQ68-DOT-8X12	1/2	3/4	1.29	1-1/16
AQ68-DOT-8XM16	1/2	M16	1.41	7/8
AQ68-DOT-8XM22	1/2	M22	1.10	1-1/16
AQ68-DOT-10X6	5/8	3/8	1.44	15/16
AQ68-DOT-10X8	5/8	1/2	1.59	15/16
AQ68-DOT-10X12	5/8	3/4	1.13	1-1/16
AQ68-DOT-10XM22	5/8	M22	1.10	1-1/16
AQ68-DOT-12X8	3/4	1/2	1.65	1-1/16
AQ68-DOT-12X12	3/4	3/4	1.38	1-1/16

* Made to Order – consult factory for price and availability.


SERIES AQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS



AQ698-DOTS PRESS-IN CARTRIDGE ELBOW

Part Number	Tube O.D.	A	B	C	D	E
AQ698-DOTS-5/32*	5/32	0.79	0.46	3/8	0.64	1.04
AQ698-DOTS-4*	1/4	0.99	0.48	3/8	0.70	1.05
AQ698-DOTS-6*	3/8	1.08	0.63	1/2	0.92	1.35
AQ698-DOTS-8*	1/2	1.26	0.77	5/8	1.13	1.66



AQ69-DOT MALE ELBOW

Part Number	Tube O.D.	Pipe	A	B	C	D
AQ69-DOT-5/32X1	5/32	1/16	0.78	0.65	5/16	0.82
AQ69-DOT-5/32X2	5/32	1/8	0.78	0.69	5/16	0.89
AQ69-DOT-3X2	3/16	1/8	0.88	0.75	3/8	0.97
AQ69-DOT-4X2	1/4	1/8	1.01	0.79	3/8	0.99
AQ69-DOT-4X4	1/4	1/4	1.05	0.84	3/8	1.07
AQ69-DOT-4X6	1/4	3/8	1.10	0.98	1/2	1.27
AQ69-DOT-6X2	3/8	1/8	1.00	0.80	1/2	1.12
AQ69-DOT-6X4	3/8	1/4	1.10	0.98	1/2	1.29
AQ69-DOT-6X6	3/8	3/8	1.08	0.98	1/2	1.31
AQ69-DOT-6X8	3/8	1/2	1.14	1.20	5/8	1.56
AQ69-DOT-8X4	1/2	1/4	1.26	1.05	5/8	1.44
AQ69-DOT-8X6	1/2	3/8	1.26	1.05	5/8	1.44
AQ69-DOT-8X8	1/2	1/2	1.25	1.26	5/8	1.64
AQ69-DOT-10X6	5/8	3/8	1.25	1.26	5/8	1.59
AQ69-DOT-10X8	5/8	1/2	1.34	1.29	11/16	1.74
AQ69-DOT-12X8	3/4	1/2	1.32	1.36	15/16	1.90
AQ69-DOT-12X12	3/4	3/4	1.32	1.36	15/16	1.90

Quality Assured

Our people go the extra mile to meet your precise specifications in Alkon's complete quality lab. It's part of our Quality Pledge to you.




* Made to Order – consult factory for price and availability.

SERIES AQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS


AQ69-DOTS SWIVEL MALE ELBOW

Part Number	Tube O.D.	Pipe	A	B	C	D	E
AQ69-DOTS-5/32X2	5/32	1/8	0.79	0.88	7/16	1.10	3/8
AQ69-DOTS-5/32X4*	5/32	1/4	0.79	1.08	9/16	1.29	3/8
AQ69-DOTS-3X2	3/16	1/8	0.88	0.92	7/16	1.13	3/8
AQ69-DOTS-4X0	1/4	10/32	0.96	0.76	5/16	1.00	3/8
AQ69-DOTS-4X2	1/4	1/8	0.94	0.90	7/16	1.13	3/8
AQ69-DOTS-4X4	1/4	1/4	0.99	1.09	9/16	1.33	3/8
AQ69-DOTS-4X6	1/4	3/8	1.02	1.13	11/16	1.37	3/8
AQ69-DOTS-4XM12	1/4	M12	0.94	1.06	11/16	1.36	3/8
AQ69-DOTS-6X2	3/8	1/8	1.05	1.06	7/16	1.39	1/2
AQ69-DOTS-6X4	3/8	1/4	1.08	1.14	9/16	1.46	1/2
AQ69-DOTS-6X6	3/8	3/8	1.10	1.23	11/16	1.55	1/2
AQ69-DOTS-6X8	3/8	1/2	1.10	1.53	7/8	1.85	1/2
AQ69-DOTS-6X12	3/8	3/4	1.10	1.53	1-1/16	1.86	1/2
AQ69-DOTS-6XM12	3/8	M12	1.10	1.29	11/16	1.62	1/2
AQ69-DOTS-6XM16	3/8	M16	1.10	1.29	7/8	1.62	1/2
AQ69-DOTS-6XM22	3/8	M22	1.10	1.29	1-1/16	1.62	1/2
AQ69-DOTS-8X4	1/2	1/4	1.26	1.26	9/16	1.65	5/8
AQ69-DOTS-8X6	1/2	3/8	1.26	1.31	11/16	1.70	5/8
AQ69-DOTS-8X8	1/2	1/2	1.25	1.61	7/8	2.00	5/8
AQ69-DOTS-8X12	1/2	3/4	1.25	1.55	1-1/16	1.94	5/8
AQ69-DOTS-8XM22	1/2	M22	1.25	1.33	1-1/16	1.72	5/8
AQ69-DOTS-10X6	5/8	3/8	1.54	1.41	11/16	1.86	11/16
AQ69-DOTS-10X8	5/8	1/2	1.54	1.71	7/8	2.16	11/16
AQ69-DOTS-10X12	5/8	3/4	1.54	1.71	1-1/16	2.16	11/16
AQ69-DOTS-10XM22	5/8	M22	1.54	1.49	1-1/16	1.95	11/16
AQ69-DOTS-12X6	3/4	3/8	1.32	1.61	15/16	2.15	15/16
AQ69-DOTS-12X8	3/4	1/2	1.40	2.04	1-1/16	2.46	15/16
AQ69-DOTS-12X12	3/4	3/4	1.40	1.60	1-1/16	2.14	15/16



AQ70-DOT FEMALE ELBOW


Part Number	Tube O.D.	Female Pipe	A	B	C	D
AQ70-DOT-4X2	1/4	1/8	1.02	0.83	3/8	1.06
AQ70-DOT-4X4	1/4	1/4	1.13	1.03	1/2	1.31
AQ70-DOT-4X6*	1/4	3/8	1.27	0.99	5/8	1.35
AQ70-DOT-6X4	3/8	1/4	1.08	0.98	1/2	1.31
AQ70-DOT-6X6	3/8	3/8	1.08	1.05	5/8	1.41
AQ70-DOT-8X8*	1/2	1/2	1.37	1.31	5/8	1.70




* Made to Order – consult factory for price and availability.

SERIES AQ-DOT


AIR BRAKE BRASS PUSH-IN FITTINGS


AQ70-DOTS SWIVEL FEMALE ELBOW


Part Number	Tube O.D.	Female Pipe	A	B	C	D	E
AQ70-DOTS-4X2	1/4	1/8	0.94	1.09	3/8	1.33	9/16
AQ70-DOTS-4X4	1/4	1/4	0.97	1.25	3/8	1.49	3/4
AQ70-DOTS-6X4	3/8	1/4	1.10	1.48	1/2	1.80	3/4

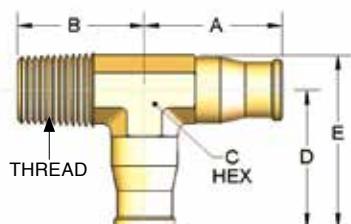
AQ71-DOT MALE RUN TEE

Part Number	Tube O.D.	Pipe	A	B	C	D	E
AQ71-DOT-4X2	1/4	1/8	1.02	0.75	3/8	1.02	1.24
AQ71-DOT-4X4	1/4	1/4	1.02	0.92	7/16	1.02	1.27
AQ71-DOT-4X6	1/4	3/8	1.08	0.98	1/2	1.08	1.42
AQ71-DOT-6X4	3/8	1/4	1.08	0.98	1/2	1.08	1.40
AQ71-DOT-6X6	3/8	3/8	1.08	0.98	1/2	1.08	1.31
AQ71-DOT-8X6*	1/2	3/8	1.26	1.05	5/8	1.26	1.55


AQ71-DOTS SWIVEL MALE RUN TEE

Part Number	Tube O.D.	Pipe	A	B	C	D	E
AQ71-DOTS-4X2	1/4	1/8	1.02	1.02	3/8	1.01	7/16
AQ71-DOTS-4X4	1/4	1/4	1.02	1.02	7/16	1.08	9/16
AQ71-DOTS-6X4	3/8	1/4	1.04	1.04	1/2	1.15	9/16
AQ71-DOTS-6X6	3/8	3/8	1.06	1.06	1/2	1.17	11/16
AQ71-DOTS-8X6	1/2	3/8	1.24	1.24	5/8	1.28	11/16
AQ71-DOTS-8X8	1/2	1/2	1.24	1.24	5/8	1.58	7/8


AQ72-DOT MALE BRANCH TEE


Part Number	Tube O.D.	Pipe	A	B	C	D
AQ72-DOT-4X2	1/4	1/8	1.02	0.75	3/8	0.98
AQ72-DOT-4X4	1/4	1/4	1.02	0.92	7/16	1.17
AQ72-DOT-6X2	3/8	1/8	1.08	0.79	1/2	1.11
AQ72-DOT-6X4	3/8	1/4	1.08	0.99	1/2	1.31
AQ72-DOT-6X6	3/8	3/8	1.09	0.99	1/2	0.31
AQ72-DOT-8X4*	1/2	1/4	1.26	1.07	5/8	1.45
AQ72-DOT-8X6	1/2	3/8	1.26	1.07	5/8	1.45

* Made to Order – consult factory for price and availability.

SERIES AQ-DOT


AIR BRAKE BRASS PUSH-IN FITTINGS

AQ72-DOTS SWIVEL MALE BRANCH TEE




Part Number	Tube O.D.	Pipe	A	B	C	D	E
AQ72-DOTS-3X2	3/16	1/8	0.88	1.04	3/8	1.26	7/16
AQ72-DOTS-4X2	1/4	1/8	1.02	1.04	3/8	1.28	7/16
AQ72-DOTS-4X4	1/4	1/4	1.01	1.04	3/8	1.30	9/16
AQ72-DOTS-6X2	3/8	1/8	1.08	1.07	1/2	1.40	7/16
AQ72-DOTS-6X4	3/8	1/4	1.06	1.17	1/2	1.50	9/16
AQ72-DOTS-6X6	3/8	3/8	1.08	1.21	1/2	1.54	11/16
AQ72-DOTS-6X8	3/8	1/2	1.08	1.40	1/2	1.70	7/8
AQ72-DOTS-6XM12	3/8	M12	1.08	1.30	1/2	1.63	11/16
AQ72-DOTS-6XM16	3/8	M16	1.08	1.30	1/2	1.63	7/8
AQ72-DOTS-6XM22	3/8	M22	1.08	1.30	1/2	1.63	1-1/16
AQ72-DOTS-8X4	1/2	1/4	1.26	1.28	5/8	1.67	9/16
AQ72-DOTS-8X6	1/2	3/8	1.26	1.31	5/8	1.70	11/16
AQ72-DOTS-8X8	1/2	1/2	1.26	1.61	5/8	2.00	7/8
AQ72-DOTS-10X8	5/8	1/2	1.32	1.74	11/16	2.20	7/8

AQ77-DOT FEMALE BRANCH TEE




Part Number	Tube O.D.	Female Pipe	A	B	C	D
AQ77-DOT-4X2	1/4	1/8	1.02	0.82	1/2	1.11
AQ77-DOT-4X4	1/4	1/4	1.08	0.97	1/2	1.26
AQ77-DOT-6X4	3/8	1/4	1.09	0.98	1/2	1.31
AQ77-DOT-6X6*	3/8	3/8	1.40	1.30	11/16	1.70
AQ77-DOT-8X4	1/2	1/4	1.26	1.16	5/8	1.55

AQ77-DOTS SWIVEL FEMALE BRANCH TEE



Part Number	Tube O.D.	Female Pipe	A	B	C	D	E
AQ77-DOTS-4X2*	1/4	1/8	1.02	1.13	3/8	1.36	9/16
AQ77-DOTS-4X4*	1/4	1/4	1.02	1.29	3/8	1.52	3/4
AQ77-DOTS-6X2	3/8	1/8	1.08	1.18	1/2	1.51	9/16
AQ77-DOTS-6X4*	3/8	1/4	1.08	1.16	1/2	1.49	3/4

AQ78-DOT REDUCING MALE RUN TEE




Part Number	Tube O.D. 1	Tube O.D. 2	Pipe	A	B	C	D	E
AQ78-DOT-6X4X4*	3/8	1/4	1/4	1.08	0.98	1/2	1.08	1.48

* Made to Order – consult factory for price and availability.


SERIES AQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS




AQ79-DOT UNION REDUCING TEE

Part Number	Tube O.D. 1	Tube O.D. 2	A	B	C	D
AQ79-DOT-4X6	1/4	3/8	1.00	1.08	1/2	1.23
AQ79-DOT-6X5/32	3/8	5/32	1.08	0.85	1/2	1.08
AQ79-DOT-6X2	3/8	1/8	1.08	0.94	1/2	1.27
AQ79-DOT-6X4	3/8	1/4	1.08	1.04	1/2	1.37




AQ82-DOT BULKHEAD UNION

Part Number	Tube O.D. 1	A	B	C	D	E
AQ82-DOT-4	1/4	1.90	1.00	11/16	11/16	1 1/2-20
AQ82-DOT-6	3/8	1.85	1.00	15/16	15/16	3/4-16
AQ82-DOT-8	1/2	2.05	1.82	15/16	1-1/8	15/16-16
AQ82-DOT-10	5/8	2.05	0.94	1-1/4	1-3/8	1/14



AQ83-DOT GLADHAND MALE BULKHEAD CONNECTOR

Part Number	Tube O.D. 1	Male Pipe	A	B	C	D
AQ83-DOT-6X8*	3/8	1/2	1.99	1-3/8	1-1/4	1-14
AQ83-DOT-8X8	1/2	1/2	1.99	1-3/8	1-1/4	1-14
AQ83-DOT-10X8	5/8	1/2	2.33	1-3/8	1-1/4	1-14

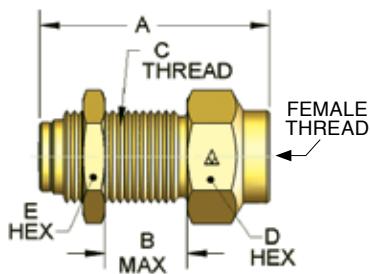

AQ86-DOT FEMALE BULKHEAD UNION

Part Number	Tube O.D.	Female Pipe	A	B	C	D	E
AQ86-DOT-4X2	1/4	1/8	1.32	0.64	1/2-20	11/16	11/16
AQ86-DOT-4X4	1/4	1/4	1.56	0.64	1/2-20	11/16	11/16
AQ86-DOT-6X4	3/8	1/4	1.87	1.00	3/4-16	15/16	15/16
AQ86-DOT-6X6	3/8	3/8	1.87	1.00	3/4-16	15/16	15/16
AQ86-DOT-8X6	1/2	3/8	2.04	1.00	15/16-16	1-1/8	1 3/8

* Made to Order – consult factory for price and availability.



In industrial applications, we know reliability is what you need, and Alkon customers know they'll get it. We make Series MAQ fittings to precise specifications with high-grade brass and specially formulated thread sealant for your application requirements.

ALKON SERIES MAQ FITTINGS ARE:

- ◆ Made here, from raw brass bars to final assembly for total quality control
- ◆ Available in nickel-plated CA 360 and CA 377 brass for high gloss and corrosion resistance
- ◆ Engineered and tested to ensure maximum flow, easy installation and the most reliable airtight seal



SERIES MAQ

METRIC BRASS PUSH-IN INDUSTRIAL FITTINGS




ALKON FEATURE	YOUR BENEFIT
Positive seal; more tube support area beyond the O-ring than competing products	Compensates for bias-cut tubing, cuts troubleshooting time dramatically
Swivel elbows and tees	Easier close center-line installation, no orientation problems
Custom part orders are welcome	Get and pay for exactly what you need – nothing more, nothing less

SERIES MAQ

METRIC BRASS PUSH-IN INDUSTRIAL FITTINGS


SPECIFICATIONS

Temperature Range: -20°F to 220°F
 Threads: BSPT
 Recommended Tubing: Nylon




MAQ56-P TUBE TO TUBE UNION REDUCER

Part Number	Tube O.D. 1	Tube O.D. 2	A	B
MAQ56-P-4MX5/32*	4mm	5/32	1.18	11.1
MAQ56-P-6MX4*	6mm	1/4	1.43	14.3
MAQ56-P-8MX4*	8mm	1/4	1.53	14.3
MAQ56-P-8MX6*	8mm	3/8	1.58	14.3
MAQ56-P-10MX6*	10mm	3/8	1.58	18.3
MAQ56-P-12MX8*	12mm	1/2	1.73	20.6




MAQ62-P UNION

Part Number	Tube O.D.	A	B
MAQ62-P-4	4mm	29.7	11.2
MAQ62-P-6	6mm	32.0	14.2
MAQ62-P-8	8mm	36.8	14.3
MAQ62-P-10	10mm	36.8	18.3
MAQ62-P-12	12mm	38.4	20.2



MAQ64-P UNION TEE

Part Number	Tube O.D.	A	B	C
MAQ64-P-4*	4mm	16.7	16.7	7.9
MAQ64-P-6	6mm	20.8	20.8	9.5
MAQ64-P-8	8mm	24.1	24.1	11.1
MAQ64-P-10*	10mm	24.7	24.7	12.7
MAQ64-P-12*	12mm	30.5	30.5	15.9




MAQ65-P UNION ELBOW

Part Number	Tube O.D.	A	B	C
MAQ65-P-6	6mm	21.6	28.0	9.5
MAQ65-P-8	8mm	24.1	32.4	11.1


* Made to Order – consult factory for price and availability.

SERIES MAQ


METRIC BRASS PUSH-IN METRIC INDUSTRIAL FITTINGS


MAQ66-P FEMALE CONNECTOR

Part Number	Tube O.D.	Female Pipe	A	B
MAQ66-P-4X2*	4mm	1/8	28.2	14.0
MAQ66-P-4X4*	4mm	1/4	35.2	32.0
MAQ66-P-6X2*	6mm	1/8	33.0	29.5
MAQ66-P-6X4*	6mm	1/4	33.5	19.0
MAQ66-P-8X4*	8mm	1/4	33.5	19.0
MAQ66-P-8X6*	8mm	3/8	39.5	36.0


MAQ68-P MALE CONNECTOR

Part Number	Tube O.D.	Pipe (BSPT)	A	B	C
MAQ68-P-4X2*	4mm	1/8	18.6	3.5	11.0
MAQ68-P-4X4*	4mm	1/4	23.1	3.5	14.0
MAQ68-P-6X2	6mm	1/8	21.5	5.1	14.0
MAQ68-P-6X4	6mm	1/4	23.1	5.1	14.0
MAQ68-P-8X4	8mm	1/4	25.9	6.0	14.0
MAQ68-P-8X6*	8mm	3/8	24.5	6.0	19.0
MAQ68-P-10X4*	10mm	1/4	31.2	7.9	18.0
MAQ68-P-10X6*	10mm	3/8	31.2	7.9	18.0
MAQ68-P-12X4	12mm	1/4	32.0	7.9	18.0
MAQ68-P-12X6*	12mm	3/8	32.0	9.0	18.0
MAQ68-P-12X8*	12mm	1/2	30.7	10.3	22.0



MAQ68-P MALE CONNECTOR WITH "G" THREADS

Part Number	Tube O.D.	Pipe Thread (BSP) (BSPP)	A	B	C
MAQ68-P-4X0G*	4mm	M5	19.8	2.3	9
MAQ68-P-4X2G*	4mm	1/8	18.4	3.5	14
MAQ68-P-4X4G*	4mm	1/4	19.8	3.5	19
MAQ68-P-6X0G*	6mm	M5	21.6	2.3	12
MAQ68-P-6X2G*	6mm	1/8	20.0	3.5	14
MAQ68-P-6X4G*	6mm	1/4	21.6	5.1	19
MAQ68-P-8X4G*	8mm	1/4	21.6	6.0	19
MAQ68-P-8X6G*	8mm	3/8	24.1	7.1	22
MAQ68-P-10X4G*	10mm	1/4	26.3	7.9	18
MAQ68-P-10X6G*	10mm	3/8	23.2	7.9	22
MAQ68-P-12X4G*	12mm	1/4	27.1	7.9	18
MAQ68-P-12X6G*	12mm	3/8	24.6	9.9	22
MAQ68-P-12X8G*	12mm	1/2	25.2	10.3	27

* Made to Order – consult factory for price and availability.

SERIES MAQ

METRIC BRASS PUSH-IN METRIC INDUSTRIAL FITTINGS




MAQ69-PS SWIVEL MALE ELBOW

Part Number	Tube O.D.	Pipe (BSPT)	A	B	C	D	E
MAQ69-PS-4X2	4mm	1/8	17.0	22.1	11.0	28.2	9.5
MAQ69-PS-4X4	4mm	1/4	17.0	26.3	14.0	32.4	9.5
MAQ69-PS-6X2	6mm	1/8	20.9	22.4	11.0	29.3	9.5
MAQ69-PS-6X4	6mm	1/4	21.7	27.1	14.0	34.0	9.5
MAQ69-PS-8X4	8mm	1/4	24.0	29.3	14.0	37.6	11.0
MAQ69-PS-8X6	8mm	3/8	24.0	29.9	19.0	38.2	11.0
MAQ69-PS-10X4	10mm	1/4	24.3	29.6	14.0	38.5	12.7
MAQ69-PS-10X6	10mm	3/8	24.3	31.8	19.0	39.9	12.7
MAQ69-PS-12X6	12mm	3/8	26.5	32.5	19.0	42.2	15.9
MAQ69-PS-12X8	12mm	1/2	26.5	37.8	22.0	47.8	15.9

MAQ71-PS SWIVEL MALE RUN TEE

Part Number	Tube O.D.	Pipe (BSPT)	A	B	C	D	E
MAQ71-PS-4X2*	4mm	1/8	19.7	16.5	11.0	29.7	11.0
MAQ71-PS-4X4*	4mm	1/4	19.7	16.5	14.0	34.7	14.0
MAQ71-PS-6X2*	6mm	1/8	26.0	22.5	11.0	28.7	11.0
MAQ71-PS-6X4*	6mm	1/4	26.0	22.5	14.0	33.7	14.0
MAQ71-PS-8X4*	8mm	1/4	27.5	24.0	14.0	35.2	14.0
MAQ71-PS-8X6*	8mm	3/8	27.5	24.0	18.0	35.2	19.0
MAQ71-PS-10X4*	10mm	1/4	27.0	23.5	14.0	35.2	14.0
MAQ71-PS-10X6*	10mm	3/8	27.0	23.5	18.0	35.2	19.0
MAQ71-PS-12X6*	12mm	3/8	30.0	26.5	18.0	37.0	19.0
MAQ71-PS-12X8*	12mm	1/2	31.0	28.0	22.0	40.0	22.0

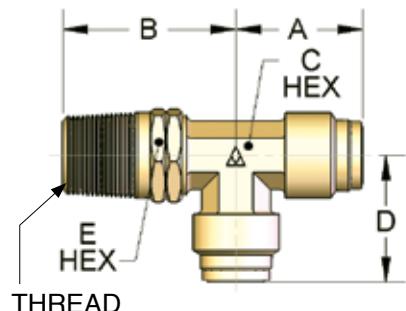

Never Settle for Less


Our production equipment combines the latest CNC technologies with equipment we customized or built from the ground up to meet our strict quality standards. If we can build our own machines, you know we can make a custom fitting for you.



* Made to Order – consult factory for price and availability.


SERIES MAQ

METRIC BRASS PUSH-IN METRIC INDUSTRIAL FITTINGS

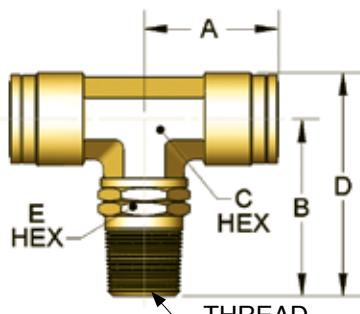

MAQ72-PS SWIVEL MALE BRANCH TEE

Part Number	Tube O.D.	Pipe (BSPT)	A	B	C	D	E
MAQ72-PS-4X2*	4mm	1/8	19.2	16.0	11.0	29.7	11.0
MAQ72-PS-4X4*	4mm	1/4	19.2	16.0	14.0	34.7	14.0
MAQ72-PS-6X2*	6mm	1/8	26.0	22.5	11.0	31.2	11.0
MAQ72-PS-6X4*	6mm	1/4	26.0	22.5	14.0	36.2	14.0
MAQ72-PS-8X4*	8mm	1/4	27.0	23.5	14.0	36.7	14.0
MAQ72-PS-8X6*	8mm	3/8	27.0	23.5	18.0	36.7	19.0
MAQ72-PS-10X4*	10mm	1/4	27.5	24.0	14.0	35.5	14.0
MAQ72-PS-10X6*	10mm	3/8	27.5	24.0	18.0	37.5	19.0
MAQ72-PS-12X6*	12mm	3/8	29.5	26.0	18.0	38.0	19.0
MAQ72-PS-12X8*	12mm	1/2	33.0	29.0	22.0	38.0	22.0



MAQ82-P BULKHEAD UNION

Part Number	Tube O.D.	A	B	C	D	E
MAQ82-P-4	4mm	36.5	12.7	16.0	16.0	7/16-20
MAQ82-P-6	6mm	39.2	22.6	17.0	17.0	5/8-18
MAQ82-P-8	8mm	43.9	22.6	20.0	20.0	5/8-18
MAQ82-P-10	10mm	43.9	22.6	20.0	20.0	3/4-16
MAQ82-P-12	12mm	46.6	19.0	28.5	28.5	1 5/16-16

Viton® O-Ring Seals in Series MAQ Fittings

Viton® seals are available from stock in a selected assortment of parts and can be installed in any Series MAQ fitting.

To order, just replace "P" or "PS" in series MAQ part number with "V" or "VS."

Consult Alkon for availability of AFLAS, EPR, EPDM and other O-ring seals in Series MAQ fittings.

Viton® is a registered trademark of DuPont Dow Elastomers.



* Made to Order – consult factory for price and availability.



Alkon Series MAQ-DOT fittings are used in construction and agricultural equipment, public transit, and other industrial machines on six continents.

ALKON SERIES MAQ-DOT FITTINGS ARE:

- ◆ Designed to provide the same high performance and time savings as all Alkon push-in fittings
- ◆ Available in nickel-plated brass and brass



SERIES MAQ-DOT

METRIC AIR BRAKE BRASS PUSH-IN FITTINGS



ALKON FEATURE	YOUR BENEFIT
Positive seal; more tube support area beyond the O-ring than competing products	Compensates for bias-cut tubing, cuts troubleshooting time dramatically
Swivel elbows and tees	Easier close center-line installation, no orientation problems
Sealant (LOCTITE® 516 standard; others available) pre-applied to all MAQ Series male threads	No charge
Custom part orders are welcome	Get and pay for exactly what you need – nothing more, nothing less


LOCTITE® is a trademark of Henkel Corporation, U.S.A.

SERIES MAQ-DOT


METRIC AIR BRAKE BRASS PUSH-IN FITTINGS

SPECIFICATIONS
Temperature Range:


-40°F to 220°F


MAQ62-DOT UNION CONNECTOR

Part Number	Tube O.D. 1	A	B
MAQ62-DOT-4	4mm	38.4	9.7
MAQ62-DOT-6	6mm	40.1	11.9
MAQ62-DOT-8	8mm	40.1	14.2
MAQ62-DOT-10	10mm	40.1	17.3
MAQ62-DOT-12	12mm	40.1	19.8

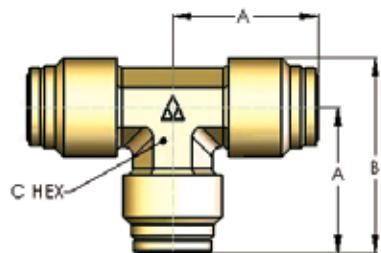
MAQ64-DOT UNION TEE

Part Number	Tube O.D.	A	B	C	D
MAQ64-DOT-6	6mm	21.6	21.6	9.5	27.7
MAQ64-DOT-8	8mm	24.4	24.4	12.7	32.6
MAQ64-DOT-10	10mm	24.4	24.4	12.7	32.6
MAQ64-DOT-12	12mm	25.4	25.4	15.9	35.6



MAQ68-DOT MALE CONNECTOR

Metric Tube NPTF Thread

Part Number	Tube O.D.	Pipe (NPTF)	A	B	C
MAQ68-DOT-6X2	6mm	1/8	23.4	3.6	11.1
MAQ68-DOT-6X4	6mm	1/4	24.6	3.6	14.3
MAQ68-DOT-8X2	8mm	1/8	25.7	3.6	14.3
MAQ68-DOT-8X4	8mm	1/4	26.7	5.5	14.3
MAQ68-DOT-8X6	8mm	3/8	26.8	5.5	17.5
MAQ68-DOT-10X4	10mm	1/4	29.2	7.1	17.5
MAQ68-DOT-10X6	10mm	3/8	29.3	7.1	17.5
MAQ68-DOT-12X4	12mm	1/4	32.3	7.9	17.5
MAQ68-DOT-12X6	12mm	3/8	27.7	9.5	17.5

SERIES MAQ-DOT

METRIC AIR BRAKE BRASS PUSH-IN FITTINGS



MAQ68-DOT MALE CONNECTOR
Metric Tube Metric Thread

Part Number	Tube O.D.	Metric Thread	A	B
MAQ68-DOT-6XM12	6mm	M12	28.8	17.0
MAQ68-DOT-6XM16	6mm	M16	25.6	22.0
MAQ68-DOT-6XM22	6mm	M22	25.6	27.0
MAQ68-DOT-8XM12	8mm	M12	30.0	17.0
MAQ68-DOT-8XM16	8mm	M16	28.1	22.0
MAQ68-DOT-8XM22	8mm	M22	28.1	27.0
MAQ68-DOT-10XM12	10mm	M12	30.68	17.0
MAQ68-DOT-10XM16	10mm	M16	29.3	22.0
MAQ68-DOT-10XM22	10mm	M22	27.4	27.0
MAQ68-DOT-12XM12	12mm	M12	30.8	17.0
MAQ68-DOT-12XM16	12mm	M16	30.3	22.0
MAQ68-DOT-12XM22	12mm	M22	26.2	22.0

SHAPE CONFIGURATION CHART:

Use the following chart as a guide when placing your order for the Series MAQ-DOT 69, 71, and 72 Metric Air Brake Brass Push-In Fittings.

MAQ - DOTS - X

SHAPE	
69	Male Elbow
71	Male Run Tee
72	Male Branch Tee

TUBE SIZE	
4	4mm
6	6mm
8	8mm
10	10mm
12	12mm


THREAD	
M	Metric Straight w/Original Seal
S	Standard NPTF
Blank	Metric BSPT

THREAD	
12	M12 x 1.5
16	M16 x 1.5
22	M22 x 1.5
2	1/8"
4	1/4"
6	3/8"
8	1/2"

Dimensional data available upon request.

SERIES MAQ-DOT

METRIC AIR BRAKE BRASS PUSH-IN FITTINGS



MAQ82-DOT BULKHEAD UNION Metric Tube Metric Thread


Part Number	Tube O.D.	A	B	C	D	E
MAQ82-DOT-4*	4mm	36.5	12.7	15.8	15.8	7/16-20
MAQ82-DOT-6*	6mm	39.2	22.6	17.5	17.5	1/2-20
MAQ82-DOT-8*	8mm	43.9	22.6	20.6	20.6	5/8-19
MAQ82-DOT-10*	10mm	43.9	22.6	20.6	20.6	3/4-16
MAQ82-DOT-12	12mm	43.9	22.6	28.6	28.6	15/16-16

* Made to Order – consult factory for price and availability.

GENERAL ORDERING GUIDE:

Use this chart as a guide when placing your order for any series Brass Push-In Fittings.

1. Choose **Series AQ, XQ, or MAQ** configurations.
2. Choose the shape of the configuration from assigned part number.
3. Choose the style of the configuration.
4. Choose the tube size based on fractional or metric measurements of the configuration.
5. Choose the thread size based on fractional or metric measurements of the configuration.

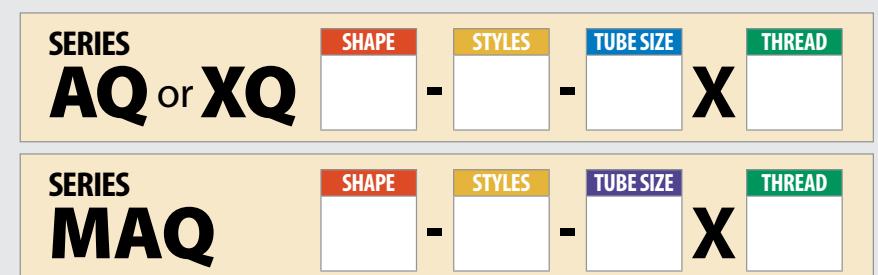

SHAPE	Use the assigned part number here.	TUBE SIZE Fractional	THREAD NPTF Fractional	THREAD BSPT Fractional	
2	1/8"	0	10/32"	2R	1/8"
5/32	5/32"	2	1/8"	4R	1/4"
4	1/4"	4	1/4"	6R	3/8"
6	3/8"	6	3/8"	8R	1/2"
8	1/2"	10	5/8"		
		12	3/4"		
STYLES		TUBE SIZE Metric	THREAD (O-Ring Seal) Metric		
P	Non-Swivel	4	M12 x 1.5		
PS	Swivel	6	M16 x 1.5		
DOT	DOT – Non-Swivel	8	M22 x 1.5		
DOTS	DOT – Swivel	10			
N⁺	Nickel Plated Brass (can be added to any fitting)	12			
V⁺	Viton O-Ring(s) (can be added to any fitting)	BSPP PIPE THREADS			
		0G	M5		
		2G	1/8" BSPP		
		4G	1/4" BSPP		
		6G	3/8" BSPP		
		8G	1/2" BSPP		

[†]Minimum quantity may apply.

Metric shapes only available in swivels.



SERIES AP

BRASS TUBE FITTINGS FOR PLASTIC TUBING

Make the most of every fitting you buy with Alkon Series AP tube fittings. These fittings are specifically designed for reuse – even the tubing – to keep working from one job to the next.

ALKON SERIES AP FITTINGS ARE:

- ◆ Built with reusable components, even tubing; connect/disconnect multiple times
- ◆ Compatible with a variety of tubing materials to meet any application requirements
- ◆ The fittings of choice for critical pneumatic manufacturing processes, motion controls and many special applications
- ◆ Engineered and tested to ensure maximum flow, easy installation and the most reliable airtight seal



ALKON FEATURE	YOUR BENEFIT
Full range of configurations, O.D., sizes and threads	Get the right fit for every connection
Chrome-plated brass couplers and shut-offs	Extra-durable and well suited to systems involving food processing, refrigeration, and reactants
Testing for precision and performance in our custom testing lab	Get airtight performance you can count on
Custom part orders are welcome	Get and pay for exactly what you need – nothing more, nothing less



SERIES AP

BRASS TUBE FITTINGS FOR PLASTIC TUBING

SPECIFICATIONS

Temperature Range Nylon Sleeve: -40° F to 225° F


Material of Straights: Brass CA 360

Temperature Range Brass Sleeve: -40° F to 325° F


Material of Sleeves: Brass/Nylon

Material of Shapes (Elbow, Tees): Brass CA 377

Compatible Tubing: Soft Metal, Polyethylene, Nylon


AP56-P REDUCING UNION


Part Number	Tube O.D.	A	B	C
AP56-P-6X4	3/8X1/4	1.263	0.895	9/16
AP56-P-8X6*	1/2X3/8	1.637	1.244	3/4


AP59-P CAP

Part Number	Tube O.D.	A
AP59-P-4	1/4	0.500
AP59-P-5*	5/16	0.531
AP59-P-6	3/8	0.562
AP59-P-8*	1/2	0.593


AP60-P PLASTIC SLEEVE

Part Number	Tube O.D.	A
AP60-P-4	1/4	0.322
AP60-P-5	5/16	0.340
AP60-P-6	3/8	0.358
AP60-P-8	1/2	0.400



AP61-B UNIVERSAL NUT AND BRASS SLEEVE ASSEMBLY

Part Number	Tube O.D.	A	B	Thread
AP61-B-2	1/8	0.375	3/8	5/16-24
AP61-B-3	3/16	0.406	7/16	3/8-24
AP61-B-4	1/4	0.343	7/16	3/8-24
AP61-B-5	5/16	0.343	1/2	7/16-24
AP61-B-6	3/8	0.375	9/16	1/2-24
AP61-B-8	1/2	0.421	13/16	11/16-20

* Made to Order – consult factory for price and availability.


SERIES AP

BRASS TUBE FITTINGS FOR PLASTIC TUBING




AP61-P NUT AND PLASTIC SLEEVE ASSEMBLY

Part Number	Tube O.D.	A	B	Thread
AP61-P-4	1/4	0.345	7/16	3/8-24
AP61-P-5	5/16	0.343	1/2	7/16-24
AP61-P-6	3/8	0.365	9/16	1/2-24
AP61-P-8	1/2	0.428	13/16	11/16-20




AP61-U NUT ONLY

Part Number	Tube O.D.	A	B	Thread
AP61-U-2	1/8	0.375	3/8	5/16-24
AP61-U-3*	3/16	0.406	7/16	3/8-24
AP61-U-4	1/4	0.345	7/16	3/8-24
AP61-U-5	5/16	0.355	1/2	7/16-24
AP61-U-6	3/8	0.365	9/16	1/2-24
AP61-U-8	1/2	0.428	13/16	11/16-20




AP62-C UNION TUBE - TO COMPRESSION

Part Number	Tube O.D.	A	B
AP62-C-4*	1/8	1.250	7/16
AP62-C-5*	5/16	1.281	1/2
AP62-C-6*	3/8	1.406	9/16



AP62-P UNION

Part Number	Tube O.D.	A	B
AP62-P-2	1/8	1.277	5/16
AP62-P-3	3/16	1.328	7/16
AP62-P-4	1/4	1.241	7/16
AP62-P-5	5/16	1.248	1/2
AP62-P-6	3/8	1.241	9/16
AP62-P-8	1/2	1.601	3/4




AP64-P UNION

Part Number	Tube O.D.	A	B
AP64-P-2	1/8	0.825	5/16
AP64-P-3	3/16	0.835	5/16
AP64-P-4	1/4	0.766	5/16
AP64-P-5	5/16	0.915	3/8
AP64-P-6	3/8	0.802	3/8
AP64-P-8	1/2	1.14	5/8


* Made to Order – consult factory for price and availability.

SERIES AP


BRASS TUBE FITTINGS FOR PLASTIC TUBING


AP66-P FEMALE CONNECTOR

Part Number	Tube O.D.	Female Pipe	A	B
AP66-P-2X2*	1/8	1/8	1.045	9/16
AP66-P-3X2*	3/16	1/8	1.060	9/16
AP66-P-3X4*	3/16	1/4	1.265	11/16
AP66-P-4X2*	1/4	1/8	1.020	1/2
AP66-P-4X4	1/4	1/4	1.207	5/8
AP66-P-4X6*	1/4	3/8	1.272	7/8
AP66-P-5X2	5/16	1/8	1.200	1/2
AP66-P-6X4	3/8	1/4	1.177	5/8
AP66-P-8X6	1/2	3/8	1.350	13/16

AP68-P MALE CONNECTOR


Part Number	Tube O.D.	Pipe	A	B
AP68-P-2X0*	1/8	10/32**	0.878	5/16
AP68-P-2X2	1/8	1/8	1.124	7/16
AP68-P-3X2	3/16	1/8	1.133	7/16
AP68-P-4X0	1/4	10/32**	0.864	3/8
AP68-P-4X2	1/4	1/8	1.057	7/16
AP68-P-4X4	1/4	1/4	1.267	9/16
AP68-P-4X6	1/4	3/8	1.332	11/16
AP68-P-5X2	5/16	1/8	1.123	1/2
AP68-P-5X4	5/16	1/4	1.292	9/16
AP68-P-6X2	3/8	1/8	1.083	9/16
AP68-P-6X4	3/8	1/4	1.271	9/16
AP68-P-6X6	3/8	3/8	1.271	11/16
AP68-P-8X4*	1/2	1/4	1.343	
AP68-P-8X6	1/2	3/8	1.443	11/16
AP68-P-8X8	1/2	1/2	1.674	7/8


AP69-L EXTRA-LONG MALE ELBOW

Part Number	Tube O.D.	Pipe	A	B	C
AP69-L-4X4	1/4	1/4	0.834	1.500	3/8


* Made to Order – consult factory for price and availability.

** Furnished with nylon gasket.

SERIES AP


BRASS TUBE FITTINGS FOR PLASTIC TUBING

AP69-P MALE ELBOW

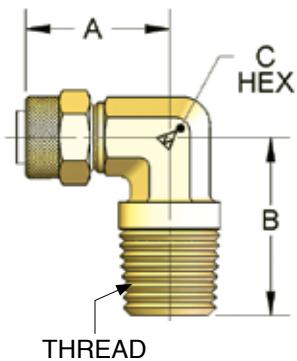


Part Number	Tube O.D.	Pipe	A	B	C
AP69-P-2X2	1/8	1/8	0.800	0.689	5/16
AP69-P-3X2	3/16	1/8	0.809	0.690	3/8
AP69-P-4X1*	1/4	1/16	0.830	0.625	0.375
AP69-P-4X2	1/4	1/8	0.830	0.748	3/8
AP69-P-4X4	1/4	1/4	0.882	0.958	3/8
AP69-P-4X6	1/4	3/8	0.954	0.984	1/2
AP69-P-5X2	5/16	1/8	0.894	0.750	3/8
AP69-P-6X2	3/8	1/8	0.865	0.750	3/8
AP69-P-6X4	3/8	1/4	0.943	1.053	1/2
AP69-P-6X6	3/8	3/8	0.912	0.984	1/2
AP69-P-8X6	1/2	3/8	1.197	1.006	5/8
AP69-P-8X8	1/2	1/2	1.197	1.196	5/8

AP70-P FEMALE ELBOW



Part Number	Tube O.D.	Female Pipe	A	B	C
AP70-P-2X2	1/8	1/8	0.900	0.750	3/8
AP70-P-3X2	3/16	1/8	0.905	0.750	3/8
AP70-P-4X2	1/4	1/8	0.889	0.867	3/8
AP70-P-4X4	1/4	1/4	0.970	1.025	1/2
AP70-P-6X4	3/8	1/4	0.960	1.000	1/2
AP70-P-8X6	1/2	3/8	1.140	1.062	5/8

AP71-P MALE RUN TEE

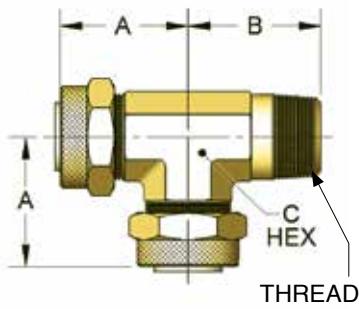


Part Number	Tube O.D.	Pipe	A	B	C
AP71-P-2X2*	1/8	1/8	0.825	0.655	5/16
AP71-P-3X2*	3/16	1/8	0.835	0.655	5/16
AP71-P-4X2*	1/4	1/8	0.895	0.750	3/8
AP71-P-4X4	1/4	1/4	0.926	0.937	7/16
AP71-P-5X2*	5/16	1/8	0.895	0.750	3/8
AP71-P-6X4	3/8	1/4	0.908	0.949	7/16
AP71-P-8X6 *	1/2	3/8	1.140	1.052	5/8

* Made to Order – consult factory for price and availability.

SERIES AP


BRASS TUBE FITTINGS FOR PLASTIC TUBING

AP72-P MALE BRANCH TEE




Part Number	Tube O.D.	Pipe	A	B	C
AP72-P-2X2*	1/8	1/8	0.825	0.700	5/16
AP72-P-3X2*	3/16	1/8	0.835	0.700	5/16
AP72-P-4X2	1/4	1/8	0.895	0.750	3/8
AP72-P-4X4	1/4	1/4	0.927	0.897	7/16
AP72-P-5X2*	5/16	1/8	0.904	0.745	3/8
AP72-P-6X2	3/8	1/8	0.859	0.750	7/16
AP72-P-6X4	3/8	1/4	0.908	0.897	7/16
AP72-P-8X6*	1/2	3/8	1.140	1.052	5/8

AP77-P FEMALE BRANCH TEE




Part Number	Tube O.D.	Female Pipe	A	B	C
AP77-P-4X2*	1/4	1/8	0.771	0.937	7/16
AP77-P-4X4*	1/4	1/4	0.940	0.984	1/2
AP77-P-4X6*	1/4	3/8	0.893	1.125	5/8

AP79-P UNION REDUCING TEE REDUCING ON BRANCH




Part Number	Tube O.D. 1	Tube O.D. 2	A	B	C
AP79-P-6X4	3/8	1/4	0.802	0.896	3/8

AP82-C BULKHEAD UNION - TO STANDARD COMPRESSION



Part Number	Tube O.D.	A	B	C
AP82-C-4	1/4	1.796	0.375	0.562
AP82-C-6*	3/8	2.000	0.375	0.687

AP82-P BULKHEAD UNION




Part Number	Tube O.D.	A	B	C
AP82-P-4	1/4	1.790	0.312	9/16
AP82-P-5*	5/16	1.790	0.312	5/8
AP82-P-6	3/8	1.792	0.375	11/16
AP82-P-8*	1/2	2.262	0.375	7/8

* Made to Order – consult factory for price and availability.

SERIES AP

BRASS TUBE FITTINGS FOR PLASTIC TUBING




AP92-P QUICK DISCONNECT FITTING

When tube is disconnected, flow shuts off automatically


Part Number	Tube O.D.	Pipe	A	B
AP92-P-4X2*	1/4	1/8	1.153	7/16
AP92-P-4X4*	1/4	1/4	1.332	9/16
AP92-P-5X2*	5/16	1/8	1.205	1/2
AP92-P-6X4*	3/8	1/4	1.350	9/16

DOUBLE-END SHUT-OFF CHROME-PLATED BRASS COUPLERS



AP94-D AP-TO-AP


Part Number	Tube O.D.	A
AP94-D-4*	1/4	3.672
AP94-D-6*	3/8	3.823



AP98-D AP TO MALE P.T.


Part Number	Tube O.D.	Pipe	A
AP98-D-4X2*	1/4	1/8	2.888
AP98-D-4X4*	1/4	1/4	2.910
AP98-D-6X4*	3/8	1/4	3.015

SINGLE-END SHUT-OFF CHROME-PLATED BRASS COUPLERS

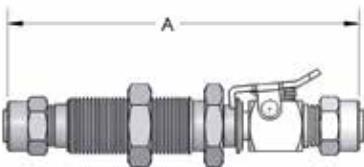

AP94-P COUPLERS AP-TO-AP

Part Number	Tube O.D.	A
AP94-P-4	1/4	3.000
AP94-P-6*	3/8	3.562




AP98-P COUPLERS "AP" TO MALE P.T.

Part Number	Tube O.D.	Pipe	A
AP98-P-4X2*	1/4	1/8	2.312
AP98-P-4X4*	1/4	1/4	2.312
AP98-P-6X4*	3/8	1/4	2.625

* Made to Order – consult factory for price and availability.

SERIES AP


BRASS TUBE FITTINGS FOR PLASTIC TUBING



SINGLE-END SHUT-OFF BODY ONLY, CHROME-PLATED BRASS


WITH AP CONNECTION

Part Number	Tube O.D.	A	B	C	D Thread
AP94-B-4	1/4	2.140	0.625	5/8	1/2-24
AP94-B-6*	3/8	2.232	0.812	13/16	11/16-24



WITH MALE P.T. CONNECTION


Part Number	Tube O.D.	Pipe	A	B
AP98-T-4X2	1/4	1/8	1.320	0.500
AP98-T-4X4	1/4	1/4	1.270	0.562
AP98-T-6X4	3/8	1/4	1.400	0.625

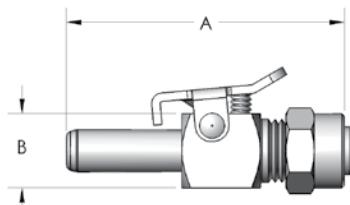

SINGLE-END SHUT-OFF INSERT ONLY CHROME-PLATED BRASS

WITH AP CONNECTION


Part Number	Tube O.D.	Used With	A	B
AP94-M-4	1/4	AP98-T-4X2	1.693	0.437
		AP98-T-4X4		
AP94-M-6*	3/8	AP98-T-6X4	1.925	0.562



DOUBLE-END SHUT-OFF INSERT ONLY CHROME-PLATED BRASS

WITH AP CONNECTION

Part Number	Tube O.D.	Used With	A	B
AP94-MD-4	1/4	AP98-T-4X2	2.402	0.437
		AP98-T-4X4		
AP94-MD-6*	3/8	AP98-T-6X4	2.460	0.562



APC61-P NUT AND PLASTIC SLEEVE ASSEMBLY CHROME-PLATED BRASS

Part Number	Tube O.D.	A	B	C
APC61-P-4	1/4	0.345	7/16	3/8-24
APC61-P-6	3/8	0.365	9/16	1/2-24

* Made to Order – consult factory for price and availability.



SERIES XQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS

Alkon Series XQ-DOT air brake brass push-in fittings hold up better in extreme temperatures from blistering heat to numbing cold. Better chemical resistance helps protect against early failure.

ALKON SERIES XQ-DOT FITTINGS ARE:

- ◆ Able to withstand temperature extremes from -40°F to 400°F
- ◆ Made with higher grade thread sealant resists chemical attack, corrosion, vibration and thermal shock for a longer lasting tight seal
- ◆ Designed for OTR vehicles, such as heavy machinery, agricultural/construction equipment, public transit and oil/gas industry applications



ALKON FEATURE	YOUR BENEFIT
Positive seal; more tube support area beyond the O-ring than competing products	Compensates for bias-cut tubing, cuts troubleshooting time dramatically
Swivel elbows and tees	Easier close center-line installation, no orientation problems
Fixed elbows and tees	Great performance and great economy
Sealant (ST-3® standard; others available) pre-applied to all XQ-DOT Series male threads	No charge
Custom part orders are welcome	Get and pay for exactly what you need – nothing more, nothing less

ST-3® is a trademark of ND Industries.

SERIES XQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS

SPECIFICATIONS

Temperature Range: -40° F to 400° F
 Threads: NPTF Standard
 Recommended Tubing: J844 Air Brake Tubing

Air Brake Performance Requirements: D.O.T. FMVSS 571.106 / SAE J1131 / J2494-1 & J2494-3
 Brass: CA360 & CA377


XQ54 45° MALE ELBOW



Part Number	Tube O.D.	Male Pipe
XQ54-DOT-4X2	1/4	1/8
XQ54-DOT-4X4	1/4	1/4
XQ54-DOT-6X2	3/8	1/8
XQ54-DOT-6X4	3/8	1/4
XQ54-DOT-6X6	3/8	3/8
XQ54-DOT-6X8	3/8	1/2
XQ54-DOT-8X4	1/2	1/4
XQ54-DOT-8X6	1/2	3/8
XQ54-DOT-8X8	1/2	1/2

XQ54 SWIVEL 45° MALE ELBOW

Part Number	Tube O.D.	Male Pipe
XQ54-DOTS-4X2	1/4	1/8
XQ54-DOTS-4X4	1/4	1/4
XQ54-DOTS-6X2	3/8	1/8
XQ54-DOTS-6X4	3/8	1/4
XQ54-DOTS-6X6	3/8	3/8
XQ54-DOTS-8X4*	1/2	1/4
XQ54-DOTS-8X6	1/2	3/8
XQ54-DOTS-8X8	1/2	1/2

XQ62 UNION CONNECTOR

Part Number	Tube O.D.
XQ62-DOT-5/32	5/32
XQ62-DOT-4	1/4
XQ62-DOT-6	3/8
XQ62-DOT-8	1/2


XQ64 UNION TEE

Part Number	Tube O.D.
XQ64-DOT-4	1/4
XQ64-DOT-6	3/8
XQ64-DOT-8	1/2

XQ65 UNION ELBOW

Part Number	Tube O.D.
XQ65-DOT-4	1/4
XQ65-DOT-6	3/8
XQ65-DOT-8	1/2


XQ66 FEMALE CONNECTOR

Part Number	Tube O.D.	Female Pipe
XQ66-DOT-4X2	1/4	1/8
XQ66-DOT-4X4	1/4	1/4
XQ66-DOT-6X4	3/8	1/4
XQ66-DOT-6X6	3/8	3/8
XQ66-DOT-8X6*	1/2	3/8
XQ66-DOT-8X8*	1/2	1/2

* Made to Order – consult factory for price and availability.

SERIES XQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS



XQ68 MALE CONNECTOR

Part Number	Tube O.D.	Male Pipe
XQ68-DOT-5/32X1	5/32	1/16
XQ68-DOT-5/32X2	5/32	1/8
XQ68-DOT-4X1	1/4	1/16
XQ68-DOT-4X2	1/4	1/8
XQ68-DOT-4X4	1/4	1/4
XQ68-DOT-4X6*	1/4	3/8
XQ68-DOT-6X2	3/8	1/8
XQ68-DOT-6X4	3/8	1/4
XQ68-DOT-6X6	3/8	3/8
XQ68-DOT-6X8	3/8	1/2
XQ68-DOT-8X4	1/2	1/4
XQ68-DOT-8X6	1/2	3/8
XQ68-DOT-8X8	1/2	1/2



XQ688 PRESS-IN CARTRIDGE

Part Number	Tube O.D.
XQ688-DOT-5/32	5/32
XQ688-DOT-3*	3/16
XQ688-DOT-4	1/4
XQ688-DOT-6	3/8
XQ688-DOT-8*	1/2



XQ69 MALE ELBOW

Part Number	Tube O.D.	Male Pipe
XQ69-DOT-5/32X2	5/32	1/8
XQ69-DOT-4X2	1/4	1/8
XQ69-DOT-4X4	1/4	1/4
XQ69-DOT-4X6	1/4	3/8
XQ69-DOT-6X2	3/8	1/8
XQ69-DOT-6X4	3/8	1/4
XQ69-DOT-6X6	3/8	3/8
XQ69-DOT-6X8	3/8	1/2
XQ69-DOT-8X4	1/2	1/4
XQ69-DOT-8X6	1/2	3/8
XQ69-DOT-8X8	1/2	1/2



XQ69 SWIVEL MALE ELBOW

Part Number	Tube O.D.	Male Pipe
XQ69-DOTS-5/32X2	5/32	1/8
XQ69-DOTS-5/32X4*	5/32	1/4
XQ69-DOTS-4X2	1/4	1/8
XQ69-DOTS-4X4	1/4	1/4
XQ69-DOTS-4X6	1/4	3/8
XQ69-DOTS-6X2	3/8	1/8
XQ69-DOTS-6X4	3/8	1/4
XQ69-DOTS-6X6	3/8	3/8
XQ69-DOTS-6X8	3/8	1/2
XQ69-DOTS-8X4	1/2	1/4
XQ69-DOTS-8X6	1/2	3/8
XQ69-DOTS-8X8	1/2	1/2



XQ70 SWIVEL FEMALE ELBOW

Part Number	Tube O.D.	Female Pipe
XQ70-DOTS-4X2	1/4	1/8
XQ70-DOTS-4X4	1/4	1/4
XQ70-DOTS-6X4	3/8	1/4



XQ70 FEMALE ELBOW

Part Number	Tube O.D.	Female Pipe
XQ70-DOT-4X2	1/4	1/8
XQ70-DOT-4X4	1/4	1/4
XQ70-DOT-4X6*	1/4	3/8
XQ70-DOT-6X4	3/8	1/4
XQ70-DOT-6X6	3/8	3/8
XQ70-DOT-8X8*	1/2	1/2

* Made to Order – consult factory for price and availability.

SERIES XQ-DOT

AIR BRAKE BRASS PUSH-IN FITTINGS




XQ72 MALE BRANCH TEE

Part Number	Tube O.D.	Male Pipe
XQ72-DOT-4X2	1/4	1/8
XQ72-DOT-4X4	1/4	1/4
XQ72-DOT-6X4	3/8	1/4
XQ72-DOT-6X6	3/8	3/8
XQ72-DOT-8X4*	1/2	1/4
XQ72-DOT-8X6	1/2	3/8




**XQ72 SWIVEL MALE
BRANCH TEE**

Part Number	Tube O.D.	Male Pipe
XQ72-DOTS-4X2	1/4	1/8
XQ72-DOTS-4X4	1/4	1/4
XQ72-DOTS-6X2	3/8	1/8
XQ72-DOTS-6X4	3/8	1/4
XQ72-DOTS-8X4	1/2	1/4
XQ72-DOTS-8X6	1/2	3/8
XQ72-DOTS-8X8	1/2	1/2




XQ77 FEMALE BRANCH TEE

Part Number	Tube O.D.	Female Pipe
XQ77-DOT-4X2	1/4	1/8
XQ77-DOT-4X4	1/4	1/4
XQ77-DOT-6X4	3/8	1/4
XQ77-DOT-6X6*	3/8	3/8



**XQ77 SWIVEL FEMALE
BRANCH TEE**

Part Number	Tube O.D.	Female Pipe
XQ77-DOTS-4X2*	1/4	1/8
XQ77-DOTS-4X4*	1/4	1/4
XQ77-DOTS-6X4*	3/8	1/4



XQ71 MALE RUN TEE

Part Number	Tube O.D.	Male Pipe
XQ71-DOT-4X2	1/4	1/8
XQ71-DOT-4X4	1/4	1/4
XQ71-DOT-6X4	3/8	1/4
XQ71-DOT-6X6	3/8	3/8
XQ71-DOT-8X6*	1/2	3/8




**XQ71 SWIVEL MALE
RUN TEE**

Part Number	Tube O.D.	Male Pipe
XQ71-DOTS-4X2	1/4	1/8
XQ71-DOTS-4X4	1/4	1/4
XQ71-DOTS-6X4	3/8	1/4
XQ71-DOTS-6X6	3/8	3/8
XQ71-DOTS-8X6	1/2	3/8
XQ71-DOTS-8X8	1/2	1/2

SERIES XQ-DOT




AIR BRAKE BRASS PUSH-IN FITTINGS


XQ78 REDUCING MALE RUN TEE

Part Number	Tube O.D. 1	Tube O.D. 2	Male Pipe
XQ78-DOT-6X4X4*	3/8	1/4	1/4

XQ79 UNION REDUCING TEE

Part Number	Tube O.D. 1	Tube O.D. 2
XQ79-DOT-4X6	1/4	3/8
XQ79-DOT-6X5/32	3/8	5/32
XQ79-DOT-6X4	3/8	1/4


XQ82 BULKHEAD UNION

Part Number	Tube O.D. 1
XQ82-DOT-4	1/4
XQ82-DOT-6	3/8
XQ82-DOT-8	1/2

XQ83 GLADHAND MALE BULKHEAD CONNECTOR

Part Number	Tube O.D. 1	Male Pipe
XQ83-DOT-6X8*	3/8	1/2
XQ83-DOT-8X8	1/2	1/2

XQ86 FEMALE BULKHEAD UNION

Part Number	Tube O.D.	Female Pipe
XQ86-DOT-4X2	1/4	1/8
XQ86-DOT-4X4	1/4	1/4
XQ86-DOT-6X4	3/8	1/4
XQ86-DOT-6X6	3/8	3/8
XQ86-DOT-8X6	1/2	3/8



Road-Tested for Years

Alkon XQ push-in fittings have been used successfully for years in all types of extreme weather and road conditions. Due to overwhelming demand, Alkon has decided to release this product as a complete product line.

Available in union, straight, elbow and tee, both swivel and non-swivel, configurations in a wide range of sizes, Alkon XQ push-in fittings are used with standard J844 air brake tubing.



SERIES 60

COMPRESSION FITTINGS

Count on Alkon Series 60 compression fittings for consistent, reliable airflow. Alkon's sure-grip connection makes installation a breeze and leakproof performance a dependable result.

SERIES 60 COMPRESSION FITTINGS ARE:

- ◆ Designed to perform in durability tests over a wide range of temperatures (-40°F to 325°F) and from 250 PSI (normal) to 400 PSI (max)
- ◆ Made of forged SAE CA377 brass and SAE C360 brass for industrial-strength endurance
- ◆ Available in multiple standard configurations



ALKON FEATURE	YOUR BENEFIT
Full range of configurations, O.D., sizes and threads	The exact fitting you need
Performance reliability is documented from as low as -40°F to as high as 325°F	Count on consistent delivery, whether you're running refrigerant or venting hot gases from industrial processes
Sophisticated technology checks critical dimensions and interior/exterior angles and concentricity to .0001"	You get fittings you can count on under any kind of pressure



SERIES 60

COMPRESSION FITTINGS

SPECIFICATIONS

Temperature Range: -40° F to 325° F
Pressure: 250 PSI Normal
 400 PSI Maximum

Material of Shapes: Forged SAE CA377 Brass
Material of Sleeves: SAE C360 Brass
Compatible Tubing: Copper, Brass, Aluminum and Thermoplastic

60 COMPRESSION SLEEVE

Part Number	Tube O.D.
60-2	1/8
60-3	3/16
60-4	1/4
60-5	5/16
60-6	3/8
60-8	1/2
60-10	5/8
60-12	3/4



64 COMPRESSION UNION TEE

Part Number	Tube O.D.	Tube O.D. 2	Tube O.D. 3
64-2	1/8	1/8	1/8
64-3	3/16	3/16	3/16
64-4	1/4	1/4	1/4
64-5	5/16	5/16	5/16
64-6	3/8	3/8	3/8
64-8	1/2	1/2	1/2
64-10	5/8	5/8	5/8
64-886	1/2	1/2	3/8

61 COMPRESSION NUT

Part Number	Tube O.D.
61-2	1/8
61-4	1/4
61-5	5/16
61-6	3/8
61-8	1/2
61-10	5/8
61-12	3/4



65 COMPRESSION UNION ELBOW

Part Number	Tube O.D.
65-2	1/8
65-4	1/4
65-5	5/16
65-6	3/8
65-8	1/2
65-10	5/8

62 COMPRESSION UNION

Part Number	Tube O.D.
62-2	1/8
62-3	3/16
62-4	1/4
62-5	5/16
62-6	3/8
62-8	1/2
62-10	5/8
62-12	3/4



66 COMPRESSION FEMALE CONNECTOR

Part Number	Tube O.D.	Female Pipe
66-42	1/4	1/8
66-44	1/4	1/4
66-64	3/8	1/4
66-66	3/8	3/8
66-108	5/8	1/2

SERIES 60

COMPRESSION FITTINGS



68 COMPRESSION MALE CONNECTOR

Part Number	Tube O.D.	Pipe
68-22	1/8	1/8
68-42	1/4	1/8
68-44	1/4	1/4
68-46	1/4	3/8
68-48	1/4	1/2
68-54	5/16	1/4
68-62	3/8	1/8
68-64	3/8	1/4
68-66	3/8	3/8
68-68	3/8	1/2
68-84	1/2	1/4
68-86	1/2	3/8
68-88	1/2	1/2
68-106	5/8	3/8
68-108	5/8	1/2



70 COMPRESSION FEMALE ELBOW

Part Number	Tube O.D.	Female Pipe
70-42	1/4	1/8
70-44	1/4	1/4
70-64	3/8	1/4
70-88	1/2	1/2



71 COMPRESSION MALE RUN TEE

Part Number	Tube O.D.	Pipe
71-42	1/4	1/8
71-44	1/4	1/4
71-64	3/8	1/4
71-86	1/2	3/8
71-88	1/2	1/2
71-108	5/8	1/2



69 COMPRESSION MALE ELBOW

Part Number	Tube O.D.	Pipe
69-22	1/8	1/8
69-42	1/4	1/8
69-44	1/4	1/4
69-46	1/4	3/8
69-48	1/4	1/2
69-54	5/16	1/4
69-62	3/8	1/8
69-64	3/8	1/4
69-66	3/8	3/8
69-68	3/8	1/2
69-84	1/2	1/4
69-86	1/2	3/8
69-88	1/2	1/2
69-106	5/8	3/8
69-108	5/8	1/2



72 COMPRESSION MALE BRANCH TEE

Part Number	Tube O.D.	Pipe
72-42	1/4	1/8
72-44	1/4	1/4
72-64	3/8	1/4
72-86	1/2	3/8
72-88	1/2	1/2



CUSTOMIZED FITTINGS

PRODUCTS TO FIT YOUR NEEDS



Flexibility to offer you standard “out of the catalog” components, as well as customized products to fit your needs.

We are large enough to handle any order, yet we are small enough to still be able to give you personal service.

Customized fittings are usually the result of combining other fittings such as pipe or barbs with Series AQ push-in fittings. This eliminates the number of leakage paths, reduces inventory items and saves assembly labor.

Examples shown above illustrate combinations with barbs, male and female pipe threads in the same fittings, different tube outside diameters in the same fitting, different pipe thread connections, and 45° elbows.

Contact Alkon for no-charge design assistance.

- ◆ Customized fittings are available in nickel-plated brass and brass.
- ◆ O-ring material and thread sealant options are available.
- ◆ Customized products are only limited by the imagination of the designer.



SERIES 100

PIPE FITTINGS

Alkon Series 100 pipe fittings are made to do their best work under pressure. We offer hundreds of standard sizes and configurations, and we welcome the opportunity to make a custom fitting for you.

ALKON SERIES 100 PIPE FITTINGS ARE:

- ◆ Built to function at pressures up to 3,000 PSI



ALKON FEATURE

Sophisticated technology checks critical dimensions and interior/exterior angles and concentricity to .0001"

YOUR BENEFIT

You get the performance you deserve

Custom part orders are welcome

Get and pay for exactly what you need – nothing more, nothing less




SERIES 100

PIPE FITTINGS


SPECIFICATIONS

Pressure:	3000 PSI
Material of Shapes:	Forged SAE CA377 Brass
Material of Straights:	SAE C360 Brass




100A 90° UNION FEMALE ELBOW

Part Number	Female PT 1	Min. Orifice Size	A	B Hex
100A-2	1/8	0.328	0.546	9/16
100A-4	1/4	0.438	0.781	11/16
100A-6	3/8	0.563	0.840	15/16
100A-8	1/2	0.702	1.090	1-1/16




101A UNION FEMALE TEE

Part Number	Female PT 1	Min. Orifice Size	A	B Hex
101A-2	1/8	0.328	0.546	9/16
101A-4	1/4	0.438	0.781	11/16
101A-6	3/8	0.563	0.840	15/16
101A-8	1/2	0.702	1.09	1-1/16



102A FEMALE CROSS

Part Number	Female PT 1	Min. Orifice Size	A	B
102A-2	1/8	0.328	0.546	9/16
102A-4	1/4	0.438	0.781	11/16
102A-6	3/8	0.563	0.840	15/16
102A-8	1/2	0.702	1.090	1-1/16




103A FEMALE COUPLING

Part Number	Female PT 1	A	C Hex
103A-2	1/8	0.750	0.562
103A-4	1/4	1.120	0.750
103A-6	3/8	1.125	0.875
103A-8	1/2	1.500	1.062


NOTE: All dimensions for reference only.

SERIES 100


PIPE FITTINGS

**104A UNION FEMALE**


Part Number	Female PT1	Min. Orifice Size	A	B Hex
104A-2	1/8	0.44	1.265	15/16
104A-4	1/4	0.56	1.468	15/16
104A-6	3/8	0.68	1.625	1-1/16

**106A FORGED MALE ELBOW**


Part Number	Male PT1	A	B Hex
106A-2	1/8	0.690	5/16
106A-4	1/4	1.000	1/2
106A-6	3/8	1.060	5/8
106A-8	1/2	1.280	11/16

**107A BRANCH TEE**


Part Number	Female PT1	Male PT2	A	B	C
107A-2	1/8	1/8	0.55	0.82	9/16
107A-2X4	1/8	1/4	0.55	1.08	11/16
107A-4	1/4	1/4	0.78	1.08	11/16
107A-6	3/8	3/8	0.84	1.23	15/16
107A-8	1/2	1/2	1.09	1.49	1-1/16

**108A FEMALE CAP**

Part Number	Female PT1	A	B Hex
108A-2	1/8	0.500	0.563
108A-4	1/4	0.750	0.750
108A-6	3/8	0.875	0.875
108A-8	1/2	1.063	1.063

**109A SQUARE-HEAD MALE PLUG**

Part Number	Male PT1	A	B Square
109A-2	1/8	0.709	9/32
109A-4	1/4	0.813	3/8
109A-6	3/8	0.849	7/16
109A-8	1/2	1.078	9/16


**109AL COUNTERSUNK HEX-HEAD MALE PLUG**

Part Number	Male PT1	A
109AL-2	1/8	0.300
109AL-4	1/4	0.400
109AL-6	3/8	0.400
109AL-8	1/2	0.550

NOTE: All dimensions for reference only.


SERIES 100

PIPE FITTINGS




110 BUSHING

Part Number	Male PT 1	Female PT 2	Min. Orifice Size	A	B Hex
110A-4X2	1/4	1/8	0.328	0.75	9/16
110A-6X2	3/8	1/8	0.328	0.75	11/16
110A-6X4	3/8	1/4	0.438	0.75	3/4
110A-8X2	1/2	1/8	0.328	1.00	7/8
110A-8X4	1/2	1/4	0.438	1.00	7/8
110A-8X6	1/2	3/8	0.563	1.00	7/8
110A-12X4	3/4	1/4	0.438	1.00	1-1/8
110A-12X6	3/4	3/8	0.563	1.00	1-1/8
110A-12X8	3/4	1/2	0.702	1.00	1-1/8




111A LOCK NUT

Part Number	PT 1	A	B Hex
111A-2	1/8	0.187	5/8
111A-4	1/4	0.250	11/16
111A-6	3/8	0.250	15/16
111A-8	1/2	0.250	1-1/8

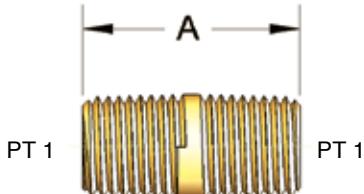

112A 90° CLOSE MALE NIPPLE

Part Number	Male PT 1	Min. Orifice Size	A
112A-2	1/8	0.281	0.750
112A-4	1/4	0.375	1.125
112A-6	3/8	0.500	1.125
112A-8	1/2	0.625	1.500
112A-12	3/4	0.750	1.500

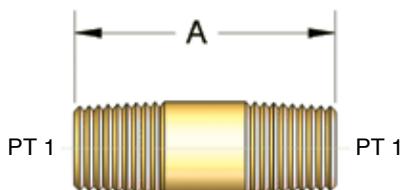


13A LONG MALE NIPPLE

Part Number	Male PT 1	Min. Orifice Size	A	Part Number	Male PT 1	Min. Orifice Size	A
113A-2X20	1/8	0.265	1-1/4	113A-4X112	1/4	0.375	7
113A-2X24	1/8	0.265	1.500	113A-6X24	3/8	0.500	1-1/2
113A-2X32	1/8	0.265	2.000	113A-6X32	3/8	0.500	2
113A-2X40	1/8	0.265	2.500	113A-6X40	3/8	0.500	2-1/2
113A-2X48	1/8	0.265	3.000	113A-6X48	3/8	0.500	3
113A-2X56	1/8	0.265	3.500	113A-6X56	3/8	0.500	3-1/2
113A-4X24	1/4	0.375	1.500	113A-8X24	1/2	0.625	1-1/2
113A-4X32	1/4	0.375	2.000	113A-8X32	1/2	0.625	2
113A-4X40	1/4	0.375	2.500	113A-8X40	1/2	0.625	2-1/2
113A-4X48	1/4	0.375	3.000	113A-8X48	1/2	0.625	3
113A-4X56	1/4	0.375	3.500	113A-8X56	1/2	0.625	3-1/2
113A-4X64	1/4	0.375	4				


NOTE: All dimensions for reference only.

SERIES 100


PIPE FITTINGS

**116A 90° STREET ELBOW**


Part Number	Female PT 1	Male PT 2	Min. Orifice Size	A	B	C Hex
116A-2X2	1/8	1/8	0.219	0.480	0.812	9/16
116A-4X2	1/4	1/8	0.219	0.718	0.900	11/16
116A-4X4	1/4	1/4	0.312	0.718	1.031	11/6
116A-6X6	3/8	3/8	0.438	0.780	1.187	15/16
116A-8X8	1/2	1/2	0.562	1.090	1.437	1-1/16

**117A SLOTTED HEAD MALE PLUG**


Part Number	Male PT 1	A
117A-2	1/8	0.320
117A-4	1/4	0.469

**119A REDUCING FEMALE ADAPTER**

Part Number	Female PT 1	Female PT 2	A	B Hex
119A-4X2	1/4	1/8	0.970	3/4
119A-6X4	3/8	1/4	1.160	7/8
119A-8X4	1/2	1/4	1.280	1-1/16
119A-8X6	1/2	3/8	1.375	1-1/16
119A-12X8	3/4	1/2	1.750	1-3/8

**120A ADAPTER**

Part Number	Female PT 1	Male PT 2	Min. Orifice Size	A	B Hex
120A-2X2	1/8	1/8	0.219	0.906	9/16
120A-4X2	1/4	1/8	0.219	1.063	3/4
120A-4X4	1/4	1/4	0.312	1.250	3/4
120A-6X2	3/8	1/8	0.219	1.070	7/8
120A-6X4	3/8	1/4	0.312	1.250	7/8
120A-6X6	3/8	3/8	0.438	1.250	7/8
120A-8X6	1/2	3/8	0.438	1.469	1-1/16
120A-8X8	1/2	1/2	0.562	1.660	1-1/16


**121A HEX-HEAD MALE PLUG**

Part Number	Male PT 1	A	B Hex
121A-2	1/8	0.531	7/16
121A-4	1/4	0.750	9/16
121A-6	3/8	0.772	11/16
121A-8	1/2	0.969	7/8
121A-12	3/4	1.062	1-1/16

NOTE: All dimensions for reference only.


SERIES 100

PIPE FITTINGS




122 HEX MALE NIPPLE

Part Number	Male PT1	Male PT2	Min. Orifice Size	A	B Hex
122A-2X2	1/8	1/8	0.219	0.906	7/16
122A-4X2	1/4	1/8	0.219	1.190	9/16
122A-4X4	1/4	1/4	0.312	1.375	9/16
122A-6X4	3/8	1/4	0.312	1.406	11/16
122A-6X6	3/8	3/8	0.438	1.406	11/16
122A-8X4	1/2	1/4	0.312	1.620	7/8
122A-8X6	1/2	3/8	0.438	1.620	7/8
122A-8X8	1/2	1/2	0.562	1.812	7/8




124A 45° STREET ELBOW

Part Number	PT1	Min. Orifice Size	A	B	C Hex
124A-2X2	1/8	0.219	0.750	0.687	9/16
124A-4X4	1/4	0.312	0.875	0.781	11/16
124A-6X6	3/8	0.438	1.000	0.875	15/16
124A-8X8	1/2	0.562	1.125	1.218	1-1/16



127A STREET TEE

Part Number	PT1	Min. Orifice Size	A	B	C Hex
127A-2	1/8	0.219	0.550	0.820	9/16
127A-4	1/4	0.313	0.781	1.156	11/16
127A-6	3/8	0.438	0.840	1.230	15/16
127A-8	1/2	0.562	1.090	1.490	1-1/16



129A BULKHEAD ADAPTER

Part Number	Female PT1	Male PT2	Min. Orifice Size	A	B Hex
129A-2X24	1/8	5/8-18	0.328	1.500	7/8
129A-4X15	1/4	3/4-16	0.421	0.940	1"
129A-4X24	1/4	3/4-16	0.440	1.500	1"
129A-6X21	3/8	1-14	0.562	1.310	1-1/8
129A-8X24	1/2	1 1/8-14	0.700	1.500	1-1/4

NOTE: All dimensions for reference only.

SERIES 29

BARB ADAPTERS

SPECIFICATIONS

Temperature Range: -40°F to 325°F

Material of Shapes: Forged SAE CA377 Brass

Intended for use with: Hose Clamp (plastic tubing or rubber hose). Barb size is hose I.D.




MALE CONNECTOR

Part Number	Hose	Pipe
29-22	1/8	1/8
29-32	3/16	1/8
29-42	1/4	1/8
29-44	1/4	1/4
29-46	1/4	3/8
29-52	5/16	1/8
29-54	5/16	1/4
29-56	5/16	3/8
29-62	3/8	1/8
29-64	3/8	1/4
29-66	3/8	3/8
29-68	3/8	1/2
29-84	1/2	1/4
29-86	1/2	3/8
29-88	1/2	1/2



FEMALE CONNECTOR

Part Number	Hose	Pipe
29F-42	1/4	1/8
29F-44	1/4	1/4
29F-54	5/16	1/4
29F-64	3/8	1/4
29F-66	3/8	3/8
29F-86	1/2	3/8
29F-88	1/2	1/2




HOSE SPLICER

Part Number	Hose
29S-4	1/4
29S-5	5/16
29S-6	3/8
29S-8	1/2



MALE ELBOW FORGING

Part Number	Hose	Pipe
29E-32	3/16	1/8
29E-34	3/16	1/4
29E-42	1/4	1/8
29E-44	1/4	1/4
29E-64	3/8	1/4
29E-66	3/8	3/8
29E-84	1/2	1/4
29E-86	1/2	3/8
29E-88	1/2	1/2



Quality testing includes an optical video probe to measure critical dimensions and interior/exterior angles and concentricity to .0001".

MISTING APPLICATIONS

3/8" NICKEL-PLATED FITTINGS



Fittings designed for misting systems, and agricultural and human cooling systems.

- ◆ AQ62-N-6 STRAIGHT UNION CONNECTOR
- ◆ AQ64-N-6 UNION TEE CONNECTOR
- ◆ AQ65-N-6 90° ELBOW UNION CONNECTOR
- ◆ AQ68-N-6X6 MALE CONNECTOR
- ◆ AQ68-N-6X4 MALE CONNECTOR
- ◆ S2853N UNION CONNECTOR WITH #10-24 NOZZLE PORT

*Additional shapes and sizes available upon request.
Special configurations developed upon request.*



SERIES NQ-NTA

AIR BRAKE BRASS COMPRESSION FITTINGS

Like any part on a commercial vehicle, compression fittings take a beating every time they hit the road.

So Alkon makes NQ-NTA brass fittings tough enough to take it and keep precise pressure in the lines. Whether it's a public transit bus, an emergency vehicle or a tractor-trailer rig, you need a smooth reliable stop every time.

ALKON NQ-NTA BRASS COMPRESSION FITTINGS ARE:

- ◆ Designed to meet SAE J246, J1131 air brake standards and all DOT standards
- ◆ Checked for critical dimensions and interior/exterior angles and concentricity to .0001"



ALKON FEATURE	YOUR BENEFIT
Full range of configurations, O.D., sizes and threads	The exact fitting you need
Performance reliability is documented from as low as -40°F to as high as 325°F	You get leak-free performance and reliable stopping power



SERIES NQ-NTA

AIR BRAKE BRASS COMPRESSION FITTINGS

SPECIFICATIONS

Temperature Range:

-40° F to 325° F

Pressure:

200 PSI Nominal/400 PSI Max

Material of Shapes:


Forged SAE CA377 Brass

Material of Straights:

SAE C360 Brass

Meets SAE J246, J1131 Air Brake standards and all DOT standards.

Fittings to be used with SAE J844 Tubing.



NQ54-NTA COMPRESSION 45° MALE ELBOW

Part Number	Tube O.D.	Pipe Thread
NQ54-NTA-4X2*	1/4	1/8
NQ54-NTA-4X4*	1/4	1/4
NQ54-NTA-6X2	3/8	1/8
NQ54-NTA-6X4*	3/8	1/4
NQ54-NTA-6X6*	3/8	3/8
NQ54-NTA-6X8	3/8	1/2
NQ54-NTA-8X4	1/2	1/4
NQ54-NTA-8X6*	1/2	3/8
NQ54-NTA-8X8	1/2	1/2
NQ54-NTA-10X6	5/8	3/8
NQ54-NTA-10X8*	5/8	1/2



NQ60-NTA COMPRESSION SLEEVE

Part Number	Tube O.D.
NQ60-NTA-4	1/4
NQ60-NTA-6	3/8
NQ60-NTA-8	1/2
NQ60-NTA-10*	5/8
NQ60-NTA-12*	3/4



NQ61-NTA COMPRESSION NUT

Part Number	Tube O.D.
NQ61-NTA-4*	1/4
NQ61-NTA-6*	3/8
NQ61-NTA-8*	1/2
NQ61-NTA-10*	5/8
NQ61-NTA-12*	3/4

* Made to Order – consult factory for price and availability.


SERIES NQ-NTA

AIR BRAKE BRASS COMPRESSION FITTINGS



NQ62-NTA COMPRESSION UNION

Part Number	Tube O.D.
NQ62-NTA-4	1/4
NQ62-NTA-6	3/8
NQ62-NTA-8	1/2
NQ62-NTA-10*	5/8
NQ62-NTA-12*	3/4



NQ64-NTA COMPRESSION TEE

Part Number	Tube O.D.
NQ64-NTA-4*	1/4
NQ64-NTA-6*	3/8
NQ64-NTA-8*	1/2
NQ64-NTA-10*	5/8



NQ65-NTA COMPRESSION UNION ELBOW

Part Number	Tube O.D.
NQ65-NTA-4*	1/4
NQ65-NTA-6*	3/8
NQ65-NTA-8*	1/2



NQ66-NTA COMPRESSION FEMALE CONNECTOR

Part Number	Tube O.D.	Female Pipe Thread
NQ66-NTA-4X2*	1/4	1/8
NQ66-NTA-4X4*	1/4	1/4
NQ66-NTA-6X2	3/8	1/8
NQ66-NTA-6X4*	3/8	1/4
NQ66-NTA-6X6*	3/8	3/8
NQ66-NTA-8X6	1/2	3/8
NQ66-NTA-8X8	1/2	1/2
NQ66-NTA-10X8	5/8	1/2

* Made to Order – consult factory for price and availability.

SERIES NQ-NTA

AIR BRAKE BRASS COMPRESSION FITTINGS



NQ68-NTA COMPRESSION MALE CONNECTOR

Part Number	Tube O.D.	Pipe Thread
NQ68-NTA-4X2	1/4	1/8
NQ68-NTA-4X4*	1/4	1/4
NQ68-NTA-4X6*	1/4	3/8
NQ68-NTA-6X2*	3/8	1/8
NQ68-NTA-6X4	3/8	1/4
NQ68-NTA-6X6	3/8	3/8
NQ68-NTA-6X8*	3/8	1/2
NQ68-NTA-8X4	1/2	1/4
NQ68-NTA-8X6	1/2	3/8
NQ68-NTA-8X8	1/2	1/2
NQ68-NTA-10X6	5/8	3/8
NQ68-NTA-10X8	5/8	1/2
NQ68-NTA-12X8	3/4	1/2
NQ68-NTA-12X12	3/4	3/4

NQ69-NTA COMPRESSION MALE ELBOW

Part Number	Tube O.D.	Pipe Thread
NQ69-NTA-4X2	1/4	1/8
NQ69-NTA-4X4	1/4	1/4
NQ69-NTA-4X6	1/4	3/8
NQ69-NTA-6X2	3/8	1/8
NQ69-NTA-6X4	3/8	1/4
NQ69-NTA-6X6	3/8	3/8
NQ69-NTA-6X8	3/8	1/2
NQ69-NTA-8X4	1/2	1/4
NQ69-NTA-8X6	1/2	3/8
NQ69-NTA-8X8	1/2	1/2
NQ69-NTA-10X6	5/8	3/8
NQ69-NTA-10X8	5/8	1/2
NQ69-NTA-12X8	3/4	1/2
NQ69-NTA-12X12	3/4	3/4


NQ70-NTA COMPRESSION FEMALE ELBOW

Part Number	Tube O.D.	Female Pipe Thread
NQ70-NTA-4X2	1/4	1/8
NQ70-NTA-4X4	1/4	1/4
NQ70-NTA-6X4	3/8	1/4
NQ70-NTA-8X8	1/2	1/2

* Made to Order – consult factory for price and availability.


SERIES NQ-NTA

AIR BRAKE BRASS COMPRESSION FITTINGS




NQ71-NTA COMPRESSION MALE RUN TEE

Part Number	Tube O.D.	Pipe Thread
NQ71-NTA-4X2	1/4	1/8
NQ71-NTA-6X2	3/8	1/8
NQ71-NTA-6X4	3/8	1/4
NQ71-NTA-6X6	3/8	3/8
NQ71-NTA-8X6	1/2	3/8
NQ71-NTA-8X8	1/2	1/2
NQ71-NTA-10X8	5/8	1/2



NQ72-NTA COMPRESSION MALE BRANCH TEE

Part Number	Tube O.D.	Pipe Thread
NQ72-NTA-4X2	1/4	1/8
NQ72-NTA-4X4	1/4	1/4
NQ72-NTA-6X2	3/8	1/8
NQ72-NTA-6X4	3/8	1/4
NQ72-NTA-6X6	3/8	3/8
NQ72-NTA-8X6	1/2	3/8
NQ72-NTA-8X8	1/2	1/2
NQ72-NTA-10X8	5/8	1/2



NQ82-NTA COMPRESSION BULKHEAD UNION

Part Number	Tube O.D.
NQ82-NTA-4	1/4
NQ82-NTA-6	3/8
NQ82-NTA-8	1/2

We Do It All

Our manufacturing processes run the gamut – from melting, forging and casting to milling, drilling, deburring, washing, thread seal application, and assembly.



* Made to Order – consult factory for price and availability.

SERIES AP310


ANGLE & IN-LINE NEEDLE VALVES

MATERIALS


Forged Brass Bodies: Brass Handle and Stem

O-Ring Packaging: Brass Nuts with Plastic Sleeves


For use with polyethylene, nylon, or soft metal tubing. Panel mount available upon request.

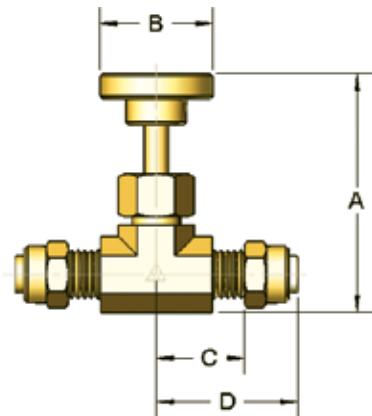

Globe Type
AP to AP

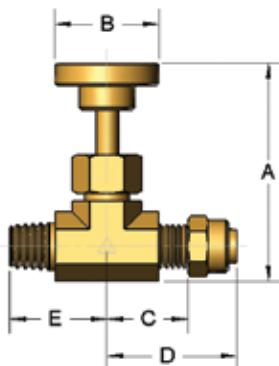

Globe Type
AP to NPT

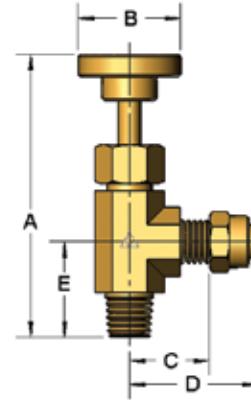

Angle Type
AP to NPT

AP NEEDLE VALVES

GLOBE TYPE AP-TO-AP

Part Number	Inlet O.D.	Outlet O.D.	CV	A Open	A Close	B	C	D	Orifice
AP310-C-4*	1/4	1/4	0.25	1.496	1.378	0.866	0.748	0.984	0.142
AP310-C-6*	3/8	3/8	0.56	1.772	1.614	1.142	0.827	1.063	0.220

GLOBE TYPE AP-to-NPT

Part Number	Inlet O.D.	Outlet O.D.	CV	A Open	A Close	B	C	D	Orifice
AP311-C-4X2*	1/8	1/4	0.25	1.496	1.378	0.866	0.748	0.748	0.126
AP311-C-4X4*	1/4	1/4	0.25	1.496	1.378	0.866	0.748	0.748	0.142
AP311-C-6X4*	1/4	3/8	0.56	1.772	1.614	1.142	0.827	0.945	0.173

ANGLE TYPE AP-TO-NPT

Part Number	Inlet O.D.	Outlet O.D.	CV	A Open	A Close	B	C	D	Orifice
AP312-C-4X2*	1/8	1/4	0.36	1.496	1.260	0.866	0.630	0.689	0.126
AP312-C-4X4*	1/4	1/4	0.36	1.496	1.378	0.866	0.630	0.748	0.126
AP312-C-6X2*	1/8	3/8	0.81	1.693	1.378	0.866	0.669	0.842	0.205

* Made to Order – consult factory for price and availability.



SERIES J

ANGLE & IN-LINE FLOW CONTROL,
NEEDLE AND CHECK VALVES

Angle Flow Control valves are designed to provide accurate flow control in a compact, labor saving package. Features like built in push-in fittings, pre-applied thread sealant, convenient swivel design and unique needle design all add up to a package that will save time, money and energy when accurate control is needed on pneumatic actuators.

ALKON SERIES J VALVES ARE:

- ◆ Effective and accurate ways to control the speed of pneumatic cylinders
- ◆ Optimized for easy installation, reliable performance
- ◆ Built in Series AQ push-in fittings or NPTF connections
- ◆ 100% tested



ALKON FEATURE	YOUR BENEFIT
"Less is best" design	Maximum reliability
100% made to order	Get what you want – and only what you want
100% tested	Every valve we make is tested to make sure its quality and performance meet your specs

SERIES J


ANGLE & IN-LINE FLOW CONTROL, NEEDLE AND CHECK VALVES

SPECIFICATIONS FOR JAQ & JPT

Temperature Range: -10° F to 160° F


Cracking Pressure: 5 PSI

Maximum Operating Pressure: 150 PSI



JAQ ANGLE FLOW CONTROL WITH SERIES AQ TUBE CONNECTIONS

Part Number	Tube O.D.	Pipe	A	B	C	D	E
JAQ-5/32X2	5/32	1/8 NPT	1.73	1.38	0.75	0.63	9/16
JAQ-4X2	1/4	1/8 NPT	1.73	1.51	0.75	0.63	9/16
JAQ-4X4	1/4	1/4 NPT	2.11	1.62	1.04	0.75	11/16
JAQ-6X4	3/8	1/4 NPT	2.11	1.59	1.04	0.75	11/16
JAQ-6X6	3/8	3/8 NPT	2.19	1.85	1.06	0.88	7/8
JAQ-8X8	1/2	3/8 NPT	2.75	1.98	1.43	1.125	1.0

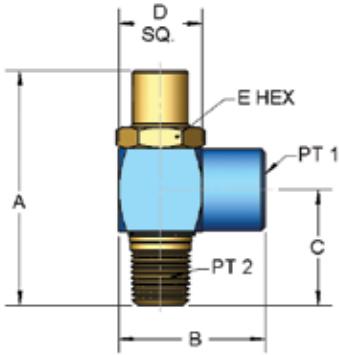

JPT ANGLE FLOW CONTROL WITH FEMALE PIPE THREADS

Part Number	P.T. 1	P.T. 2	A	B	C	D	E
JPT-2X2	1/8 NPT	1/8 NPT	1.73	1.23	0.75	0.63	9/16
JPT-2X4	1/8 NPT	1/4 NPT	2.10	1.43	1.03	0.75	11/16
JPT-4X2	1/4 NPT	1/8 NPT	1.73	1.43	0.69	0.75	9/16
JPT-4X4	1/4 NPT	1/4 NPT	2.10	1.43	1.03	0.75	11/16
JPT-4X6	1/4 NPT	3/8 NPT	2.10	1.43	1.06	0.88	7/8
JPT-6X4	3/8 NPT	1/4 NPT	2.10	1.48	0.97	0.88	11/16
JPT-6X6	3/8 NPT	3/8 NPT	2.19	1.66	1.06	0.88	7/8
JPT-6X8	3/8 NPT	1/2 NPT	2.74	1.85	1.43	1.13	1.0
JPT-8X8	1/2 NPT	1/2 NPT	2.75	2.01	1.43	1.13	1.0

SPECIFICATIONS FOR JC, JF & JN

Temperature Range: -10° F to 160° F

Cracking Pressure: 2 PSI

Maximum Operating Pressure: 3000 PSI




JC IN-LINE CHECK VALVE

Brass Body	Nickel Plated	Pipe Size NPTF	A	B	Orifice	Needle Full Open
JC1	JC1N	1/8	1.468	0.562	0.206	0.64
JC2	JC2N	1/4	1.937	0.687	0.281	1.35
JC3	JC3N	3/8	2.312	0.875	0.421	3.22
JC4	JC4N	1/2	3.250	1.187	0.515	4.96
	JC6N	3/4	4.000	1.750	0.718	9.00
	JC8N	1	4.000	1.750	0.718	9.20

SERIES J

ANGLE & IN-LINE FLOW CONTROL, NEEDLE AND CHECK VALVES

JF FLOW CONTROL VALVE														
MODEL NUMBER		VALVE DIMENSIONS (inches)								ORIFICE ON		CV FACTOR		
Brass Body	Nickel Plated	Pipe Size NPTF	A	B	C	D	E	F	G Hex Size	Check	Needle	Check	Needle Full Open	Approx. Weight
JF1	JF1N	1/8	1.468	0.562	0.913	1.803	0.250	0.687	3/32	0.602	0.125	0.60	0.30	0.19
JF2	JF2N	1/4	1.937	0.687	1.232	2.000	0.250	0.687	3/32	0.281	0.187	1.30	0.60	0.28
JF3	JF3N	3/8	2.312	0.875	1.545	2.531	0.300	0.937	3/32	0.421	0.250	2.85	1.08	0.54
JF4	JF4N	1/2	3.250	1.187	2.117	3.218	0.375	1.250	3/32	0.515	0.375	4.96	1.75	1.75
	JF6N	3/4	4.000	1.750	2.625	3.906	0.375	1.250	3/32	0.718	0.500	9.00	3.20	2.32
	JF8N	1	4.000	1.750	2.635	3.906	0.375	1.250	3/32	0.718	0.500	9.20	3.20	2.20

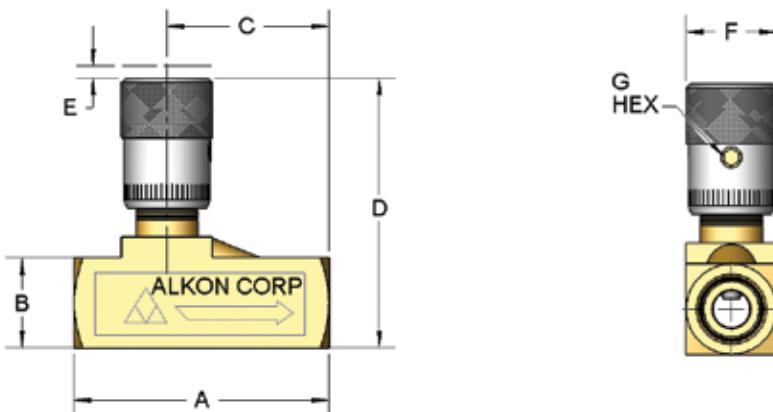

JN IN-LINE NEEDLE VALVE													
MODEL NUMBER		VALVE DIMENSIONS (inches)									CV FACTOR		
Brass Body	Nickel Plated	Pipe Size NPTF	A	B	C	D	E	F	G Hex Size	Orifice	Needle Full Open		
JN1	JN1N	1/8	1.468	0.562	0.913	1.803	0.250	0.687	3/32	0.125	0.30		
JN2	JN2N	1/4	1.937	0.687	1.232	2.000	0.250	0.687	3/32	0.187	0.60		
JN3	JN3N	3/8	2.312	0.875	1.545	2.531	0.300	0.937	3/32	0.250	1.08		
JN4	JN4N	1/2	3.250	1.187	2.117	3.218	0.375	1.250	3/32	0.375	1.75		
	JN6N	3/4	4.000	1.750	2.625	3.906	0.375	1.250	3/32	0.500	3.20		
	JN8N	1	4.000	1.750	2.635	3.906	0.375	1.250	3/32	0.500	3.20		

INDUSTRIAL TUBING

ORDERING INSTRUCTIONS:

MATERIAL / SIZE - COLOR - ROLL LENGTH (EX. AP22-BL-100)

COLOR KEY:	R = Red	O = Orange
BL = Black	GN = Green	W = White
BR = Brown	B = Blue	N = Natural
GR = Gray	Y = Yellow	S = Silver

POLYETHYLENE TUBING

Resistant to Solvents & Chemicals, Temp: -40°F To 150°F, Natural: FDA Approved, Lightweight and More Flexible

Material/Size	Tube O.D.	Tube I.D.	Wall Thickness	Min. Bend Radius	Working Pressure @ 75°F	Working Pressure @ 150°F	Colors (See key above)	Lengths (feet)
AP22	1/8	.062	.031	1/2	305 PSI	120 PSI	BL/GR/R/GN/B/Y/O/N	100/500/1000
AP5/32	5/32	.106	.025	1	175 PSI	70 PSI	BL/R/GN/B/Y/N	100/500/1000
AP44	1/4	.170	.040	1-1/4	200 PSI	80 PSI	BL/GR/R/GN/B/Y/O/N/P	100/500/1000
AP55	5/16	.187	.062	1-1/2	230 PSI	90 PSI	BL/GN/B/Y/N	100/500
AP66	3/8	.250	.062	2	190 PSI	75 PSI	BL/GR/R/GN/B/Y/O/N	100/500
AP88	1/2	.375	.062	2-1/2	135 PSI	55 PSI	BL/R/GN/B/Y/O/N	100/250/500

POLYURETHANE TUBING

Resistant to Kinks, Abrasions & Chemicals, Temp: -40°F To 165°F, Applications Include Vacuum, Fuel Lines, Robotics, Highly Flexible Tubing

Material/Size	Tube O.D.	Tube I.D.	Wall Thickness	Min. Bend Radius	Working Pressure @ 75°F	Working Pressure @ 150°F	Colors (See key above)	Lengths (feet)
PUR22	1/8	.066	.030	1/4	255 PSI	100 PSI	BL/GR/R/GN/B/Y/W/N/P	500/1000
PUR5/32	5/32	.094	.031	3/8	210 PSI	85 PSI	BL/BR/GR/R/GN/B/Y/O/N/P/W	100/500/1000
PUR33	3/16	.107	.040	3/8	220 PSI	90 PSI	B/Y/N	100/1000
PUR44	1/4	.160	.045	1/2	175 PSI	70 PSI	BL/GR/R/GN/B/Y/W/N/P	100/500/1000
PUR44H	1/4	.125	.063	1/2	265 PSI	105 PSI	BL/GR/R/GN/B/Y/O/N/W	100/500/1000
PUR66	3/8	.245	.065	7/8	170 PSI	70 PSI	BL/GR/R/GN/B/Y/O/N/W	100/500
PUR88	1/2	.320	.090	1-1/8	175 PSI	70 PSI	BL/R/B/Y/N/W	50
							BL/R/GN/B/Y/N/W	250

NYLON 12 TUBING

Temp: -60°F To 200°F, Applications Include Air, Chemicals, Lubricant and Low Pressure Hydraulics

Material/Size	Tube O.D.	Tube I.D.	Wall Thickness	Min. Bend Radius	Working Pressure @ 75°F	Working Pressure @ 150°F	Colors (See key above)	Lengths (feet)
NY22	1/8	.093	.016	1/2	270 PSI	160 PSI	BL/R/GN/B/Y/N	100/500/1000
NY5/32	5/32	.106	.025	1/2	350 PSI	210 PSI	BL/S/R/GN/B/Y/O/N	100/500/1000
NY33	3/16	.138	.025	5/8	260 PSI	160 PSI	BL/R/B/N	100/500
NY44	1/4	.180	.035	1	290 PSI	170 PSI	BL/R/GN/B/Y/O/N	100/500/1000
NY55	5/16	.232	.050	1-1/2	240 PSI	140 PSI	BL/R/GN/B/Y/N	100/500
NY66	3/8	.275	.050	1-1/2	250 PSI	150 PSI	BL/R/GN/B/Y/O/N	100/500
NY88	1/2	.375	.062	2-1/4	240 PSI	140 PSI	BL/R/GN/B/Y/N	100/250/500

METRIC NYLON 12 TUBING

Material/Size	Tube O.D.	Tube I.D.	Wall Thickness	Min. Bend Radius	Working Pressure @ 75°F	Working Pressure @ 150°F	Colors (See key above)	Lengths (feet)
MNY4	4 mm	2.7 mm	.65 mm	12.7 mm	350 PSI	210 PSI	BL/S/R/GN/B/Y/O/N	100/500/1000
MNY6	6 mm	4 mm	1.0 mm	17 mm	340 PSI	200 PSI	BL/R/GN/B/Y/O/N	100/500/1000
MNY8	8 mm	6 mm	1.0 mm	38 mm	250 PSI	150 PSI	BL/R/GN/B/Y/N	100/500
MNY10	10 mm	8 mm	1.0 mm	51 mm	190 PSI	110 PSI	BL/S/N	100/500
MNY12	12 mm	2 mm	1.0 mm	76 mm	150 PSI	90 PSI	BL/N	100/500

TUBING ACCESSORIES



TUBE RACKS

Part Number	Tube Size	Max # Tubes
AP02-P-4	1/4	2
AP10-P-4	1/4	10
AP07-P-6	3/8	7
AP06-P-8	1/2	6

TUBE CUTTER

Part Number
AP-TC

AQ COLOR COORDINATED SNAP-ON IDENTIFICATION CAPS

*Used in Coordination with Colored Plastic Tubing
for Simplification in Plumbing*


Part Number	Tube O.D.
AQCAP-2*	1/8"
AQCAP-5/32*	5/32"
AQCAP-3*	3/16"
AQCAP-4*	1/4"
AQCAP-6*	3/8"
AQCAP-8*	1/2"
AQCAP-10*	5/8"

EXAMPLE: AQCAP-4R, RED COLOR SNAP ON ID CAP

Part Color	Color Code
Blue	B
Black	BL
Green	GN
Red	R
Orange	O
Violet	V
Yellow	Y
Gray	GR

* Made to Order – consult factory for price and availability.

EMERGENCY REPAIR KITS

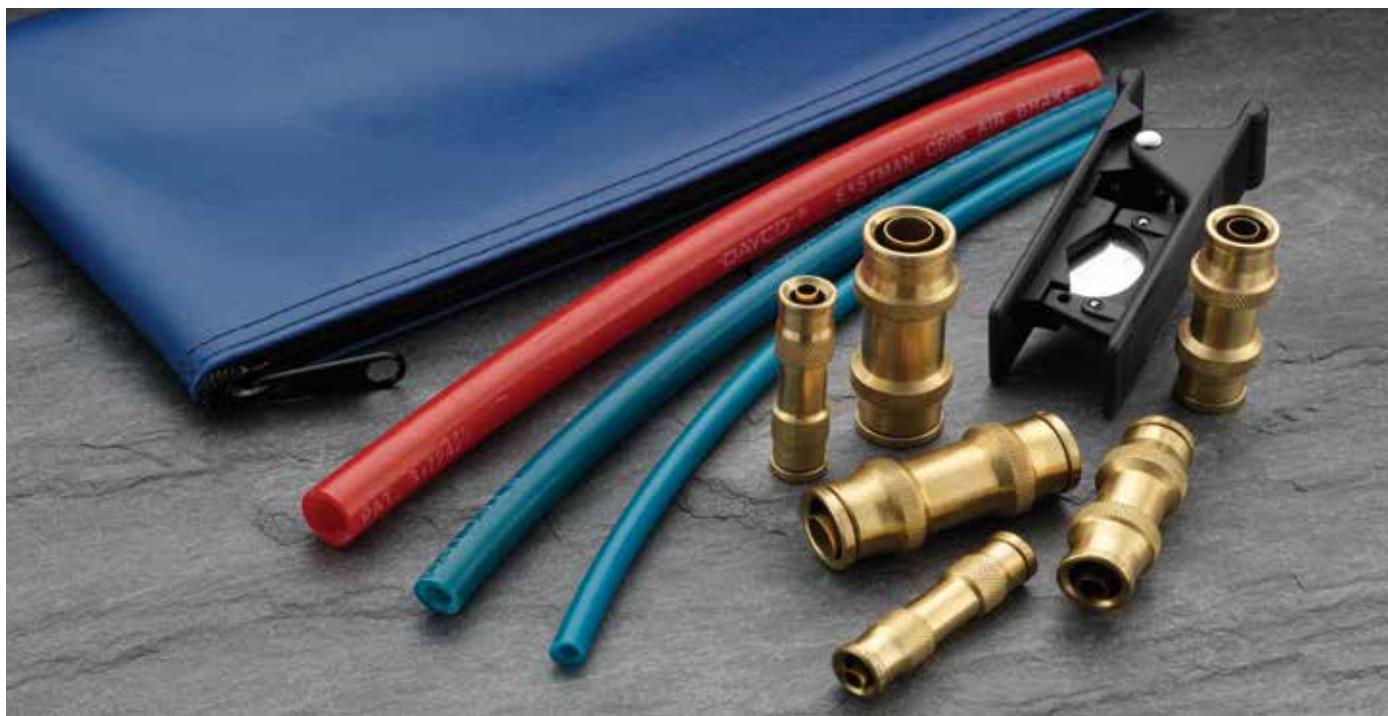

DOT EMERGENCY REPAIR KITS

PART NUMBER	INCLUDES
AQ62-DOT-KIT-1	Reusable push-in unions for 1/4", 3/8" & 1/2" tubing and tube cutter.
AQ62-DOT-KIT-2	Reusable push-in unions for 5/32", 1/4", 3/8" & 5/8" tubing and tube cutter.

With the Alkon DOT Emergency Repair Kit, fixing a malfunction has never been easier. Once the problem is located, use the tube cutter to make a clean cut, then simply push to connect the tubing into an Alkon fitting to create an airtight seal. No further tools are necessary!

We understand the value of a quick, effective, do-it-yourself repair to ensure that not only will you get right back on the road, but more importantly, your equipment will be running as smoothly as ever.

Considering everything you can plan for, why let something ruin your entire trip when it could be fixed so easily? Equip your vehicle with the Alkon DOT Emergency Repair Kit and you'll have nothing but the open road ahead.


MANIFOLDS

WITH PRE-INSTALLED PUSH-IN FITTING CARTRIDGES




We offer custom manifolds for DOT applications.

Please consult our factory if you need more information.

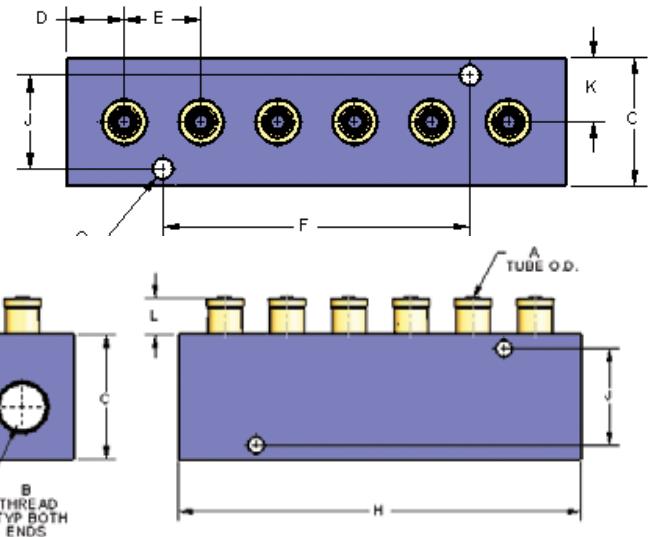

MQ22 MANIFOLDS WITH PUSH-IN FITTINGS

Part Number	Number Outlets	A-Tube O.D.	B-Pipe Thread	C	D	E	F	G	H	J	K	L
MQ22-2X4-4	4	1/8	1/4	1.00 Sq.	0.50	0.75	1.50	0.17	3.25	0.70	0.50	0.47
MQ22-2X4-6	6	1/8	1/4	1.00 Sq.	0.50	0.75	3.00	0.17	4.75	0.70	0.50	0.47
MQ22-2X4-8	8	1/8	1/4	1.00 Sq.	0.50	0.75	4.50	0.17	6.25	0.70	0.50	0.47
MQ22-2X4-10	10	1/8	1/4	1.00 Sq.	0.50	0.75	6.00	0.17	7.75	0.70	0.50	0.47
MQ22-5/32X4-4	4	5/32	1/4	1.00 Sq.	0.50	0.75	1.50	0.17	3.25	0.70	0.50	0.47
MQ22-5/32X4-6	6	5/32	1/4	1.00 Sq.	0.50	0.75	3.00	0.17	4.75	0.70	0.50	0.47
MQ22-5/32X4-8	8	5/32	1/4	1.00 Sq.	0.50	0.75	4.50	0.17	6.25	0.70	0.50	0.47
MQ22-5/32X4-10	10	5/32	1/4	1.00 Sq.	0.50	0.75	6.00	0.17	7.75	0.70	0.50	0.47
MQ22-3X4-4	4	3/16	1/4	1.00 Sq.	0.50	0.75	1.50	0.17	3.25	0.70	0.50	0.57
MQ22-3X4-6	6	3/16	1/4	1.00 Sq.	0.50	0.75	3.00	0.17	4.75	0.70	0.50	0.57
MQ22-3X4-8	8	3/16	1/4	1.00 Sq.	0.50	0.75	4.50	0.17	6.25	0.70	0.50	0.57
MQ22-3X4-10	10	3/16	1/4	1.00 Sq.	0.50	0.75	6.00	0.17	7.75	0.70	0.50	0.57
MQ22-4X6-4	4	1/4	3/8	1.13 Sq.	0.63	0.75	1.50	0.18	3.50	0.85	0.56	0.67
MQ22-4X6-6	6	1/4	3/8	1.13 Sq.	0.63	0.75	3.00	0.18	5.00	0.85	0.56	0.67
MQ22-4X6-8	8	1/4	3/8	1.13 Sq.	0.63	0.75	4.50	0.18	6.50	0.85	0.56	0.67
MQ22-4X6-10	10	1/4	3/8	1.13 Sq.	0.63	0.75	6.00	0.18	8.00	0.85	0.56	0.67
MQ22-6X6-4	4	3/8	3/8	1.13 Sq.	0.63	0.75	1.50	0.18	3.50	0.85	0.56	0.95
MQ22-6X6-6	6	3/8	3/8	1.13 Sq.	0.63	0.75	3.00	0.18	5.00	0.85	0.56	0.95
MQ22-6X6-8	8	3/8	3/8	1.13 Sq.	0.63	0.75	4.50	0.18	6.50	0.85	0.56	0.95
MQ22-6X6-10	10	3/8	3/8	1.13 Sq.	0.63	0.75	6.00	0.18	8.00	0.85	0.56	0.95

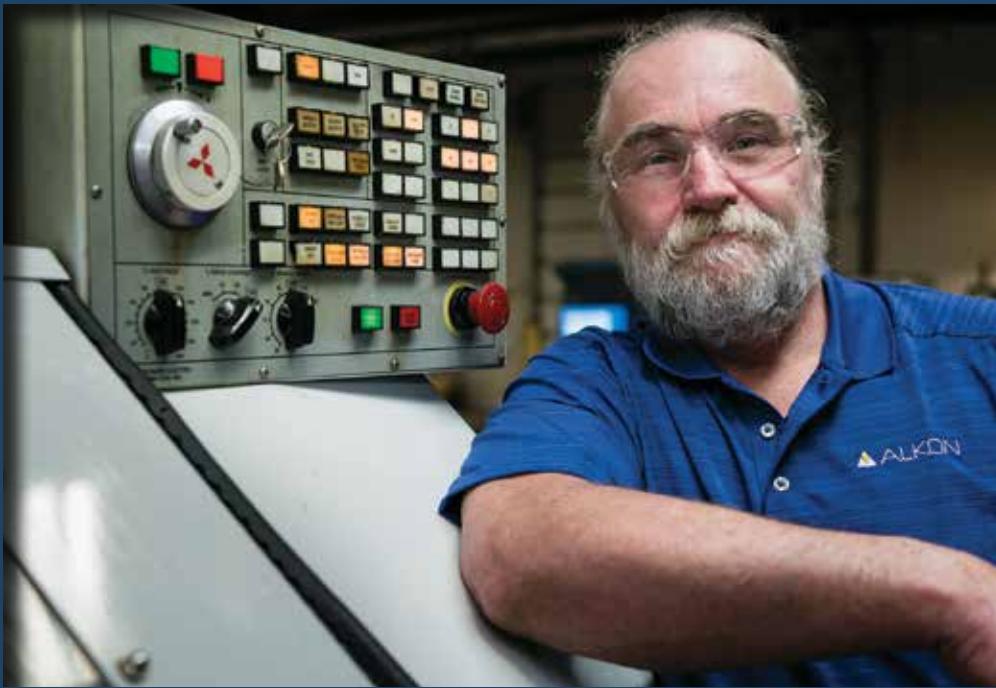

What can we do for you?

Our business is connections, and the most important connections we make are with our customers. Whether it's a custom order on short notice, design assistance, or Early Bird notices on specials and new products by email, we always do our best for you.



Keeping the world moving and working.

Get connected.

419.333.7000 or sales@alkoncorp.com





728 Graham Drive | Fremont, OH 43420

P: 419.333.7000 | F: 419.355.9211

sales@alkoncorp.com

